


Data Sheet for Article: LILE0071 - A

Elegance Long EVolution LED 38W/29W 3K/4K Dim IP54 silver

Wall, ceiling light with adjustable wattage and light colour, lumen 38W = 4200lm / 29W = 3300lm



Light distribution curve

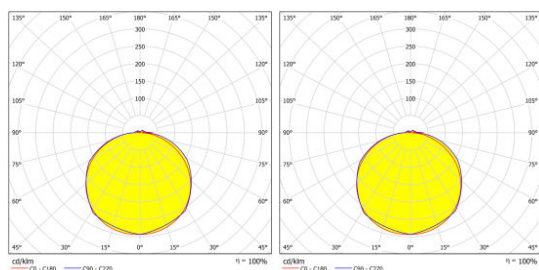

Technical Data

Net length (mm)	1.200,00
Net width (mm)	130,00
Net height (mm)	55,00
Net weight (kg)	2,40
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40

Technical Data - continued

Luminaire type	wall luminaires pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	Silver
Material	Aluminum Polycarbonate
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	29;38
Light colour	neutral white warm white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	38W = 4200
Service life	70.000h / L80 / B50
Dimmable	TRIAC
Protection class	II
IP Rating	IP54 (Ceiling mounting) IP50 (Wall mounting)
Energy efficiency class	E
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	1200x130x55

Article Table

DESCRIPTION	Order No.
Elegance Long EVOLution LED 38W/29W 3K/4K Dim IP54 silver	LILE0071-A
Wall, ceiling light with adjustable wattage and light colour, lumen 38W = 4200lm / 29W = 3300lm	
Necessary Accessories	
Suspension for Elegance Long EVOLution white	LILE0073