


Data Sheet for Article: LILE0077--

Elegance Round 3 Evolution 22W/ 16W/ 10W 3K/4K DALI IP54 white

Wall, ceiling light with adjustable wattage and light colour, lumen 10W = 1150lm / 16W = 2100lm / 22W = 2800lm



Light distribution curve




Product Details

The ELEGANCE Round 3 EVOLution is a stylish, flat surface-mounted luminaire, perfect for enhancing the aesthetics of corridors, auxiliary rooms, recreational areas, and stairwells. With switchable wattage and color temperature settings (3000K, 4000K), it offers both versatility and efficiency. Available in 10W (1150lm), 16W (2100lm), and 22W (2800lm), it provides broad and even light distribution. The DALI dimmable driver allows for flexible lighting control, and the IP54 rating makes it suitable for use in damp areas.

Technical Data

Technical Data - continued

Net height (mm)	49,00
Net diameter (mm)	270,00
Net weight (kg)	1,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Aluminum Polycarbonate
Beam angle (°)	110
Controller	LED driver AC / DC
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	22 16 10
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	10W = 1150 16W = 2100 22W = 2800
Service life	80.000h / L70 / B50; 50.000h / L80 / B50
Dimmable	DALI
Protection class	II
IP Rating	IP54
Energy efficiency class	E
Shock strength	IK10
Illuminant incl.	yes
Diameter (mm)	270
ØxH mm	270x49
Numbers of luminars per MCB B10	90
Numbers of luminars per MCB B16	144
Numbers of luminars per MCB C10	90
Numbers of luminars per MCB C16	144

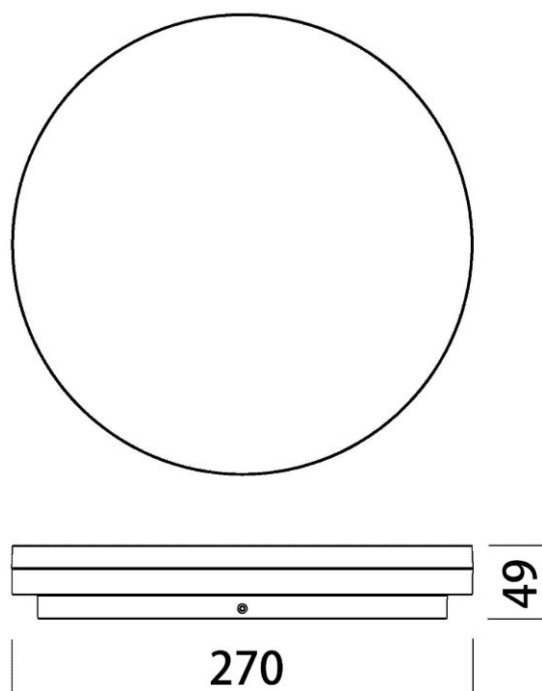**Dimensioned drawing: Elegance Round 3 Evolution 22W/ 16W/ 10W 3K/ 4K
DALI IP54 white**

Article Table

DESCRIPTION	Order No.
Elegance Round 3 Evolution 22W/16W/10W 3K/4K DALI IP54 white Wall, ceiling light with adjustable wattage and light colour, lumen 10W = 1150lm / 16W = 2100lm / 22W = 2800lm	LILE0077
Optional Accessories	
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM