


Data Sheet for Article: LILE0106--

ENE46 CL DUE 15/20W 930 1200/ 1500lm **24° white**

Wall and ceiling light with adjustable power



Light distribution curve




Technical Data

Net length (mm)	101,00
Net width (mm)	125,00
Net height (mm)	135,00
Net weight (kg)	0,90
Min. ambient temperature (°C)	-10

Technical Data - continued

Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Aluminum Plastic
Beam angle (°)	24
Operating voltage AC (V)	220-240
Operating voltage DC (V)	216
Operation current mA (mA)	65/85
Lamp holder	LED Platine
Power (W)	15 20
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	<3
Luminous flux (lm)	15W=1200 20W=1500
Service life	50.000h/ L80/ B50
Dimmable	yes trailing edge dimmable (C)
Protection class	II
IP Rating	IP20
Shock strength	IK08
Illuminant incl.	yes
Halogen-free	Yes
LxWxH mm	101x125x135

Dimensioned drawing: ENEA 46 CL DUE 15/20W 930 1200/ 1500lm 24° white

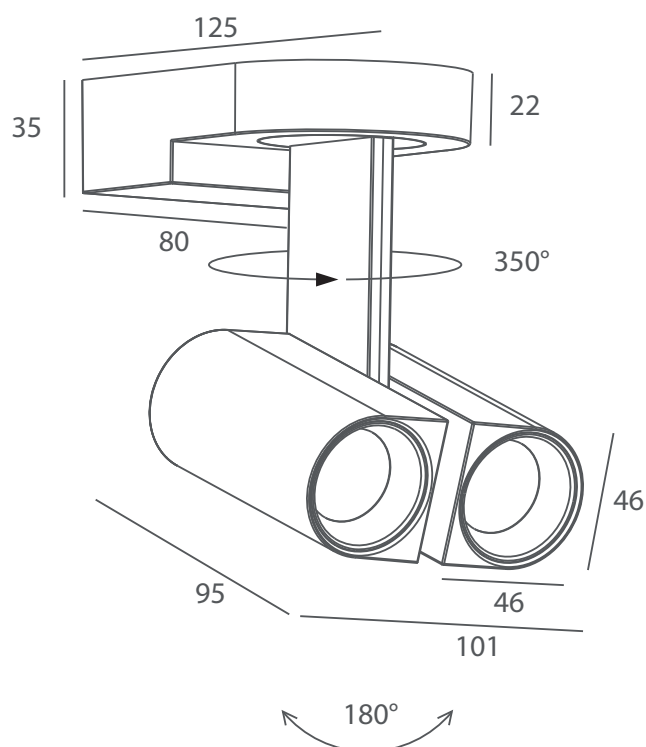

DESCRIPTION	Order No.
ENEA 46 CL DUE 15/20W 930 1200/1500lm 24° white Wall and ceiling light with adjustable power	LILE0106