


Data Sheet for Article: LILE0110--

ENEA 46 WL UNO 6W 930 510lm 24° black

Wall light



Light distribution curve




Technical Data

Net length (mm)	95,00
Net width (mm)	46,00
Net height (mm)	82,00
Net weight (kg)	0,38
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaire

Technical Data - continued

Mounting	surface mounting wall
Colour	Black
Material	Aluminum Plastic
Beam angle (°)	24
Operating voltage AC (V)	220-240
Operating voltage DC (V)	216
Operation current mA (mA)	30
Lamp holder	LED Platine
Power (W)	6
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	<3
Luminous flux (lm)	510
Service life	50.000h/ L80/ B50
Dimmable	yes trailing edge dimmable (C)
Protection class	II
IP Rating	IP20
Shock strength	IK08
Illuminant incl.	yes
Halogen-free	Yes
LxWxH mm	95x46x82

Dimensioned drawing: ENEA 46 WL UNO 6W 930 510lm 24° black

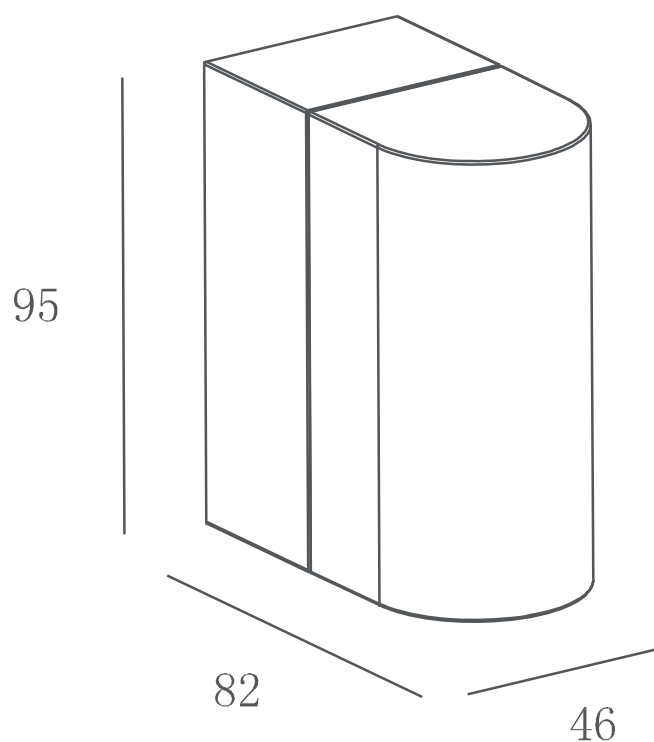

DESCRIPTION	Order No.
ENEA 46 WL UNO 6W 930 510lm 24° black Wall light	LILE0110