


Data Sheet for Article: LILE0111 --

Novia R 320 10/ 18/ 24W 3000/ 4000K Ra90 UGR19 DALI2 white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm



Light distribution curve



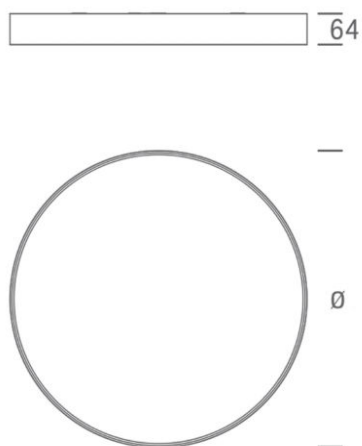
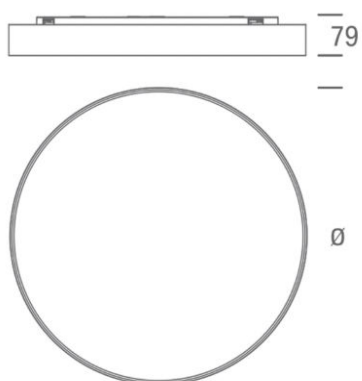
Product Details

The Nova R 320 is a stylish, round luminaire designed for wall and ceiling mounting that provides both direct and indirect lighting, with the indirect component able to be switched off as needed. Ideal for offices and workspaces, it features a CRI <90 (guaranteeing excellent color rendering) and a UGR <19 (minimizing glare). It is available in 10W (1200 lm), 18W (2160 lm) and 24W (2880 lm) with color temperatures of 3000K and 4000K. The DALI-dimmable driver and flexible installation options provide added convenience. A pendant mount is available as an option.



Technical Data

Net height (mm)	79,00
Net diameter (mm)	320,00
Net weight (kg)	2,45
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Temperature range - Operation (°C)	-10 to +40
Colour	White RAL 9016
Material	Aluminum PMMA
Glare factor (UGR)	<19
Operating voltage AC (V)	220 - 240V
Operating voltage DC (V)	186V / 216V / 240V / 260V
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	24 18 10
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	90
Luminous flux (lm)	1200/2160/2880
Service life	50.000h/ L80/ B10
Dimmable	DALI-2 DT6 Push to DIM
IP Rating	IP20
Energy efficiency class	D
Shock strength	06
Illuminant incl.	yes
Diameter (mm)	320
ØxH mm	320x79

**Dimensioned drawing: Nova R 320 10/ 18/ 24W 3000/ 4000K Ra90 UGR19
DALI2 white****Dimensioned drawing: Nova R 320 10/ 18/ 24W 3000/ 4000K Ra90 UGR19
DALI2 white**

Article Table

DESCRIPTION	Order No.
Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 DALI2 white Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 10W=1200lm / LILE0111 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm	
Optional Accessories	
Wire suspension for Novia R 320/450 round, white, L=1,5m	LILE0117
Driver for Novia R 320 RA90	LILE0124
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM