


Data Sheet for Article: LILE0115--

Novia R 600 38/55W 3000/4000K Ra90 UGR19 DALI2 white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 38W=5000lm / 55W=7000lm@4000K, 127lm/W@4000K, Ø-600mm H=64/79mm



Light distribution curve



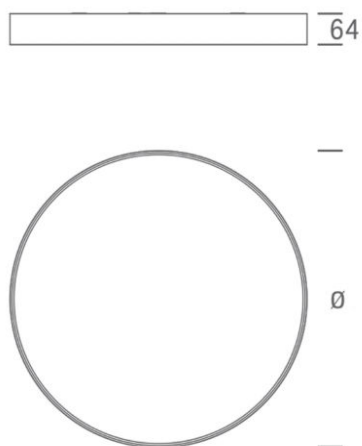
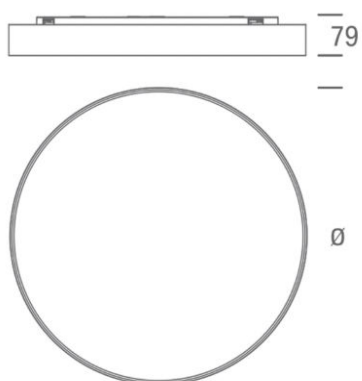
Product Details

The Novia R 600 is a stylish, round luminaire designed for wall and ceiling mounting that provides both direct and indirect lighting, with the indirect component able to be switched off as needed. Ideal for offices and workspaces, it features a CRI <90 (guaranteeing excellent color rendering) and a UGR <19 (minimizing glare). It is available in 38W (5000lm) and 55W (7000lm) with color temperatures of 3000K and 4000K. The DALI-dimmable driver and flexible installation options provide added convenience. A pendant mount is available as an option.



Technical Data

Net height (mm)	79,00
Net diameter (mm)	600,00
Net weight (kg)	6,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Temperature range - Operation (°C)	-10 to +40
Colour	White RAL 9016
Material	Aluminum PMMA
Glare factor (UGR)	<19
Operating voltage AC (V)	220 - 240V
Operating voltage DC (V)	186V / 216V / 240V / 260V
Lamp holder	LED Platine
System efficiency (lm/W)	127
Power (W)	55 38
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	90
Luminous flux (lm)	5000/7000
Service life	50.000h/ L80/ B10
Dimmable	DALI-2 DT6 Push to DIM
IP Rating	IP20
Energy efficiency class	D
Shock strength	06
Illuminant incl.	yes
Diameter (mm)	600
ØxH mm	600x79

**Dimensioned drawing: Nova R 600 38/55W 3000/4000K Ra90 UGR19
DALI2 white****Dimensioned drawing: Nova R 600 38/55W 3000/4000K Ra90 UGR19
DALI2 white**

Article Table

DESCRIPTION	Order No.
Novia R 600 38/55W 3000/4000K Ra90 UGR19 DALI2 white Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 38W=5000lm / LILE0115 55W=7000lm@4000K, 127lm/W@4000K, Ø-600mm H=64/79mm	
Optional Accessories	
Wire suspension for Novia R 600/900 round, white, L=1,5m	LILE0119
Driver for Novia R 600 RA90	LILE0126
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM