



Data Sheet for Article: LILE0130--

Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Artikelnummer of the DALI-Module: LILE0136--



Light distribution curve




Technical Data

Net height (mm)	79,00
Net diameter (mm)	320,00
Net weight (kg)	2,45
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Mounting	surface wall mounting luminaire surface mounted ceiling luminaire
Colour	White RAL 9016
Material	Aluminum PMMA
Glare factor (UGR)	19
Operating voltage AC (V)	220-240
Operating voltage DC (V)	216 260 240 186
System efficiency (lm/W)	120
Power (W)	24 18 10
Light colour	neutral white warm white
Colour temperature (K)	4000 3000
Colour rendering index (Ra)	90
Luminous flux (lm)	1200 2880 2160
Service life	50000
Protection class	I
IP Rating	IP20
Energy efficiency class	D
Shock strength	IK06

Technical Data - continued

Diameter (mm)	320
ØxH mm	320x79

Dimensioned drawing: Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white

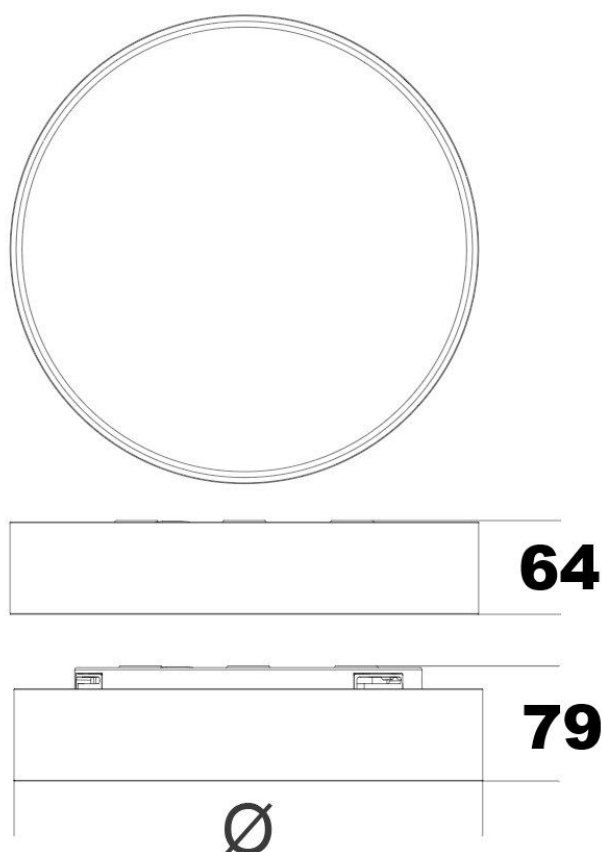

DESCRIPTION	Order No.
Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white	
Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module:	LILE0130
LILE0136--	