



Data Sheet for Article: LILE0131--

# Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Artikelnummer of the DALI-Module: LILE0136--



## Light distribution curve




## Technical Data

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Net height (mm)               | 79,00                                                                |
| Net diameter (mm)             | 320,00                                                               |
| Net weight (kg)               | 2,45                                                                 |
| Min. ambient temperature (°C) | -10                                                                  |
| Max. ambient temperature (°C) | 40                                                                   |
| Mounting                      | surface wall mounting luminaire<br>surface mounted ceiling luminaire |
| Colour                        | Black<br>RAL 9005                                                    |
| Material                      | Aluminum<br>PMMA                                                     |
| Glare factor (UGR)            | 19                                                                   |
| Operating voltage AC (V)      | 220-240                                                              |
| Operating voltage DC (V)      | 216<br>260<br>240<br>186                                             |
| System efficiency (lm/W)      | 120                                                                  |
| Power (W)                     | 24<br>18<br>10                                                       |
| Light colour                  | neutral white<br>warm white                                          |
| Colour temperature (K)        | 4000<br>3000                                                         |
| Colour rendering index (Ra)   | 90                                                                   |
| Luminous flux (lm)            | 1200<br>2880<br>2160                                                 |
| Service life                  | 50000                                                                |
| Protection class              | I                                                                    |
| IP Rating                     | IP20                                                                 |
| Energy efficiency class       | D                                                                    |
| Shock strength                | IK06                                                                 |

## Technical Data - continued

|               |        |
|---------------|--------|
| Diameter (mm) | 320    |
| ØxH mm        | 320x79 |

### Dimensioned drawing: Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

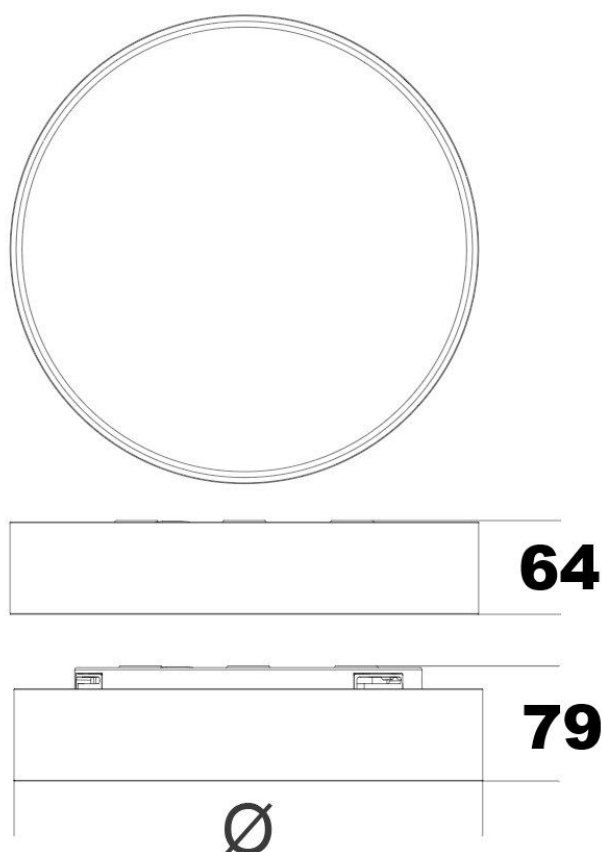

| DESCRIPTION                                                                                                                                                                                                                                                                                                          | Order No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <p>Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black</p> <p>Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--</p> | LILE0131  |