


Data Sheet for Article: LIMT0044--

Lano HP 60W 8600lm 940 IP44 M600 opal, white, Multi Lumen

complete with driver, Power DIP-Switch for: 30W-4460lm / 40W-6050lm / 50W-7370lm / 60W-8600lm



Light distribution curve




Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	60,00
Net weight (kg)	1,00
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel

Technical Data - continued

Mounting	recessed mounting ceiling
Colour	White
Material	Aluminum sheetsteel
Beam angle (°)	108
Operating voltage AC (V)	220-240
Operation current mA (mA)	30W - 325 60W - 675 40W - 450 50W - 525
Power (W)	60 50 40 30
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	4460 8600 7370 6050
Service life	50.000h / L80 / B50
Dimmable	no
Protection class	II
IP Rating	IP20/44
Energy efficiency class	B
Illuminant incl.	yes
LxWxH mm	595x595x60

**Dimensioned drawing: Lano HP 60W 8600lm 940 IP44 M600 opal, white,
Multi Lumen**

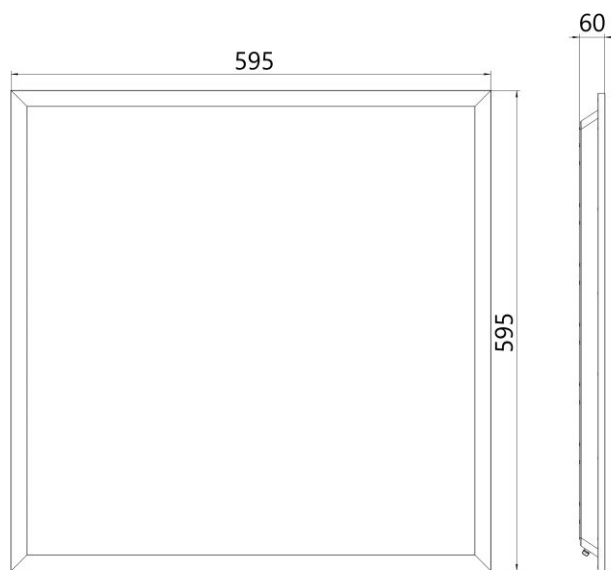

Article Table

DESCRIPTION	Order No.
Lano HP 60W 8600lm 940 IP44 M600 opal, white, Multi Lumen complete with driver, Power DIP-Switch for: 30W-4460lm / 40W-6050lm / 50W-7370lm / 60W-8600lm	LIMT0044
Optional Accessories	
Ceiling Mounting Frame for LED Panels series LANO BL M600 Surface Mount Kit	LIMK005