

Data Sheet for Article: LIMY53830S

Insert Frame without cover IP44, 3W, 230V, 2700K, 88lm black

Recessed wall light; covers LIMY53836S or LIMY53838S must be ordered separately!




Technical Data

Net height (mm)	26,00
Net diameter (mm)	83,00
Net weight (kg)	0,10
Cut-out size (mm)	65
Luminaire type	Recessed spot
Mounting	panel mounting
Temperature range - Operation (°C)	-20 to +60
Colour	Black
Material	Aluminum
Cover	Plastic opal
Beam angle (°)	120
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Output voltage DC (V)	2,5-6
Input current (A)	0,04
Output current (A)	700
Power (W)	3

Technical Data - continued

Light colour	ultra warm white
Colour temperature (K)	2700
Colour rendering index (Ra)	90
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	88
Number of lamps	1
Service life	50000h - L80/B30
Dimmable	TRIAC
Protection class	II
IP Rating	IP44
Energy efficiency class	G
Mounting Depth mm (mm)	45
Cut-out size mm	65
Diameter (mm)	80

Dimensioned drawing: Insert Frame without cover IP44, 3W, 230V, 2700K, 88lm black

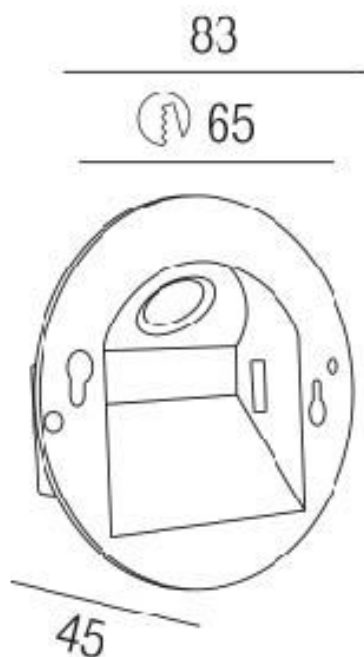

Article Table

DESCRIPTION	Order No.
Insert Frame without cover IP44, 3W, 230V, 2700K, 88lm black	LIMY53830S
Recessed wall light; covers LIMY53836S or LIMY53838S must be ordered separately!	
Necessary Accessories	
Square Flash Cover for Insert, 83 × 83 mm, black	LIMY53836S
Square Slotted Cover for Insert, 83 × 83 mm, black	LIMY53838S