


Data Sheet for Article: LIN1022737

KARO LED 18W, 4000K, 1700lm, Opal, PMMA, IP44



Light distribution curve




Technical Data

Net height (mm)	105,00
Net diameter (mm)	360,00
Net weight (kg)	0,69
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PMMA sheetsteel
Manufacturer	O2-Schrack
Controller	LED driver
Operating voltage AC (V)	220-240
Light source	LED

Technical Data - continued

Lamp holder	LED Platine
Watt (W)	18
System efficiency (lm/W)	94
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	80
Luminous flux (lm)	1700
Live time	40000
Dimmable	no
Protection class	I
IP Rating	IP44
Illuminant incl.	yes
ØxH mm	360x105

Dimensioned drawing: KARO LED 18W, 4000K, 1700lm, Opal, PMMA, IP44

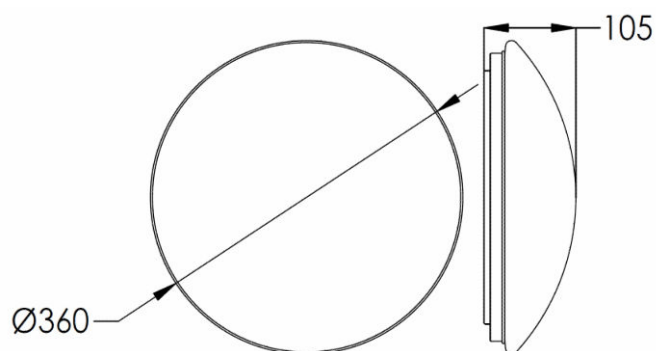

Article Table

DESCRIPTION	Order No.
KARO LED 18W, 4000K, 1700lm, Opal, PMMA, IP44	LIN1022737
Optional Accessories	
Replacement cover for Karo II LED, 18W, Ø360mm	LIIM0027