


Data Sheet for Article: LIOSM53735

TITAN 1 LED, 20W, 1840lm, 4000K, IP54

wall- & ceiling luminaire with polycarbonate cover



Light distribution curve




Technical Data

Net height (mm)	110,00
Net diameter (mm)	300,00
Net weight (kg)	0,90
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	25
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White

Technical Data - continued

Material	Metal
	Polycarbonate
Manufacturer	01-Schrack-Trinity
Controller	LED driver
Operating voltage AC (V)	230
Lamp holder	LED Platine
Watt (W)	20
System efficiency (lm/W)	92
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1840
Service life	67.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP54
Energy efficiency class	A+
Shock strength	IK10
Illuminant incl.	yes
ØxH mm	300x110

Dimensioned drawing: TITAN 1 LED, 20W, 1840lm, 4000K, IP54

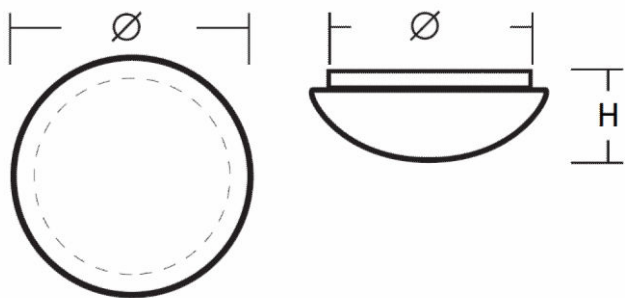

Article Table

DESCRIPTION	Order No.
TITAN 1 LED, 20W, 1840lm, 4000K, IP54	LIOSM53735
wall- & ceiling luminaire with polycarbonate cover	