


Data Sheet for Article: LIPK0006--

LEILA LED 300 20W 3000/4000K 2000lm 230V IP65 white

Wall, ceiling light for outdoor with adjustable light colour 3000 und 4000K



Light distribution curve

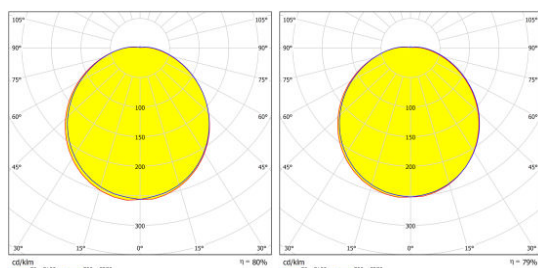


Technical Data

Net height (mm)	100,00
Net diameter (mm)	300,00
Net weight (kg)	1,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	30

Technical Data - continued

Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PC
Beam angle (°)	120
Operating voltage AC (V)	220 - 240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	20
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2000
Service life	30.000h (L70/B50)
Dimmable	no
Protection class	II
IP Rating	IP65
Energy efficiency class	F
Shock strength	IK10
Illuminant incl.	yes
ØxH mm	300x100
Diameter (mm)	300

Dimensioned drawing: LEILA LED 300 20W 3000/4000K 2000lm 230V IP65 white

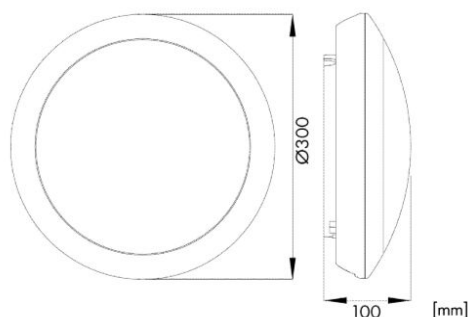

DESCRIPTION	Order No.
LEILA LED 300 20W 3000/4000K 2000lm 230V IP65 white Wall, ceiling light for outdoor with adjustable light colour 3000 und 4000K	LIPK0006