


Data Sheet for Article: LIR3H2397J

TRAIL Ground LED 1250mm 19W 1800lm, Asym., 3000K, clear, Alu

TREIBER UND ZUBEHÖRTEILE FÜR DIE BEFESTIGUNG SEPARAT ZU BESTELLEN

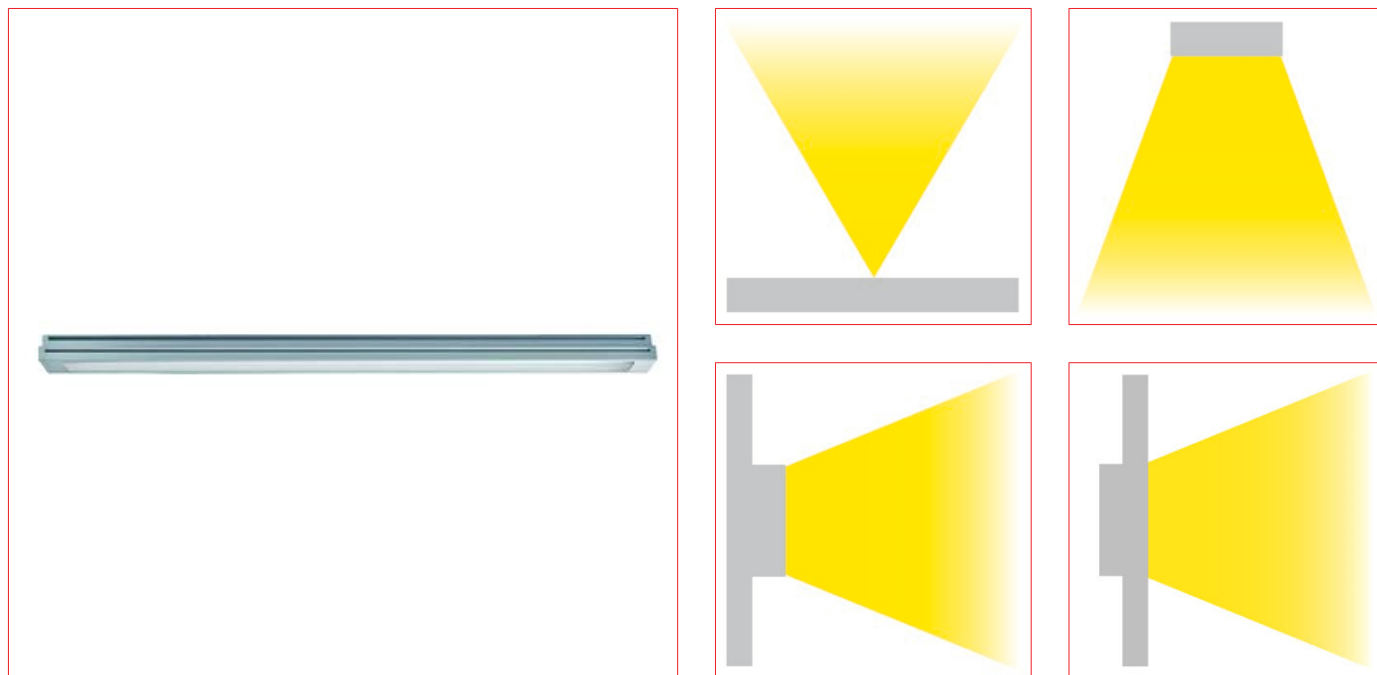


Technical Data

Luminaire type	recessed floor luminaire
Mounting	in-ground mounted
Material	Aluminum
Cover	Clear
Controller	without LED Driver
Operating voltage DC (V)	24
Light source	LED
Lamp holder	LED Platine
Watt (W)	19
Light colour	warm white
Colour temperature (K)	3000
luminous flux (lm)	1800
Number of lamps	1
Appliance class	III

Technical Data - continued

IP Rating	IP67
illuminant incl.	yes
LxWxH mm	1250x42x58

Dimensioned drawing: TRAIL Ground LED 1250mm 19W 1800lm, Asym., 3000K, clear, Alu

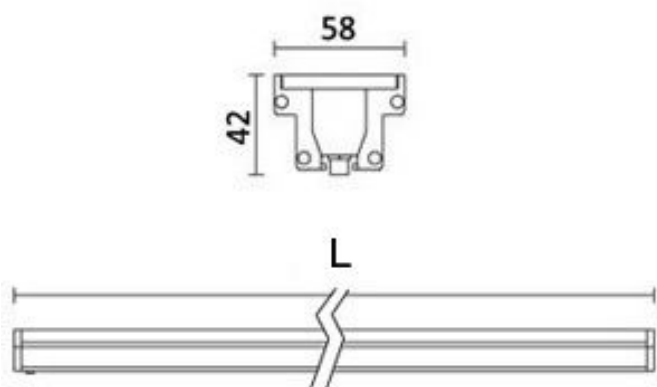

Article Table

DESCRIPTION	Order No.
TRAIL Ground LED 1250mm 19W 1800lm, Asym., 3000K, clear, Alu	LIR3H2397J
TREIBER UND ZUBEHÖRTEILE FÜR DIE BEFESTIGUNG SEPARAT ZU BESTELLEN	
Optional Accessories	
Trail wiring Box IP65 for 1250mm	LI6OT989A0
Wall mounting bracket adjustable for Trail, RAL9006	LI6TR987A0
Ceiling mounting bracket adjustable for Trail, RAL9006	LI6TR997A0
Cables for suspended installation for Trail, l=1,5m	LI6TR986A0
LED Driver 60W, 24V AC/DC, IP66	LI6TA902X0
Electronic driver 240W-24V IP67	LILL915AB0
Electronic driver 150W-24V IP67	LILL914AB0
Trail Ground recessed housing 1250mm	LI6TR999J0
Komplett mit Federn für die Verbindung und Aufreihung von mehreren Einbaugehäusen	
Trail Ground recessed housing 1250mm	LI6TR999J0
Komplett mit Federn für die Verbindung und Aufreihung von mehreren Einbaugehäusen	
LED Driver 60W, 24V AC/DC, IP66	LI6TA902X0
Electronic driver 240W-24V IP67	LILL915AB0
Electronic driver 150W-24V IP67	LILL914AB0
Trail wiring Box IP65 for 1250mm	LI6OT989A0