


Data Sheet for Article: LITP0004--


Arktur Eco LED 220W 840 30800lm 1-10V

IP65 90°, black

LED High Bay, 1-10V dimmable, lenses of PC, 2m cable

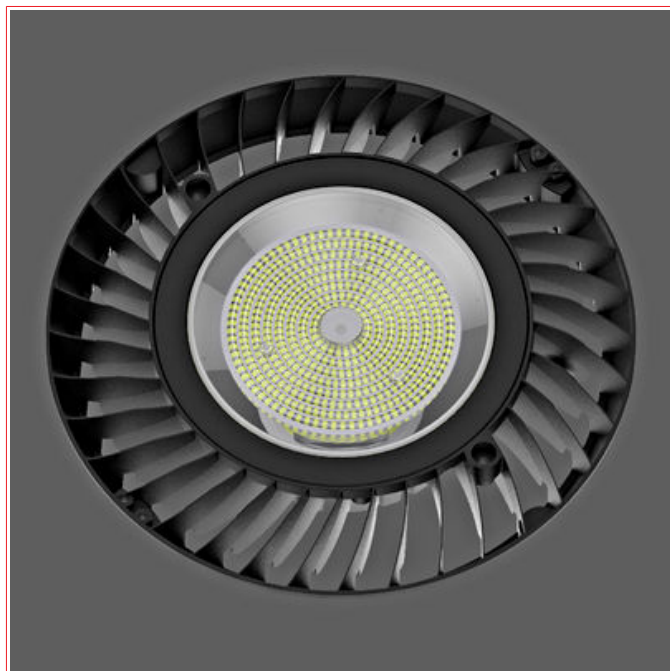

Light distribution curve




Technical Data

Net height (mm)	194,00
Net diameter (mm)	400,00
Net weight (kg)	5,90
Min. ambient temperature (°C)	-35
Max. ambient temperature (°C)	50
Luminaire type	high-bay luminaire pendulum luminaire surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling pendant
Colour	Black
Material	Aluminum Polycarbonate
Surge protection (kV)	4
Cover	Lens optic
Manufacturer	01-Schrack-Trinity
Beam angle (°)	90
Glare factor (UGR)	27,6
Controller	LED driver
Operating voltage AC (V)	100-240
Lamp holder	LED Platine
Watt (W)	220
System efficiency (lm/W)	140
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	30800
Service life	50.000h / L70 / B50
Dimmable	1-10V
Protection class	I
IP Rating	IP65
Energy efficiency class	A++ A+ A
Shock strength	IK07
Illuminant incl.	yes
ØxH mm	400x194

Dimensioned drawing: Arktur Eco LED 220W 840 30800lm 1-10V IP65 90°, black

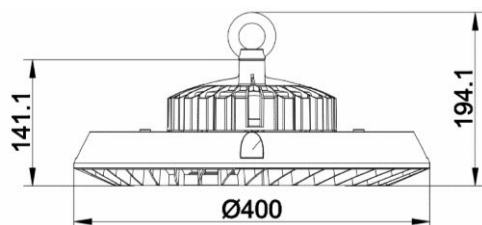

Permissible number of luminaires per fuse

Automaten Type	B10	B13	B16	C10	C13	C16
Stückzahl	5	6	8	10	12	18

Article Table

DESCRIPTION	Order No.
Arktur Eco LED 220W 840 30800lm 1-10V IP65 90°, black	LITP0004
LED High Bay, 1-10V dimmable, lenses of PC, 2m cable	
Optional Accessories	
Bracket for series Arktur Eco II LED 200W	LITP0007
Potentiometer electronic, 1-10V	EV103021
Cover EV102013--	