


Data Sheet for Article: LITP0011--


LANO 4 LED 33W 840 3960lm 850mA M625

UGR<19 microprism cover

LED panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030 (DALI, Push Dim)

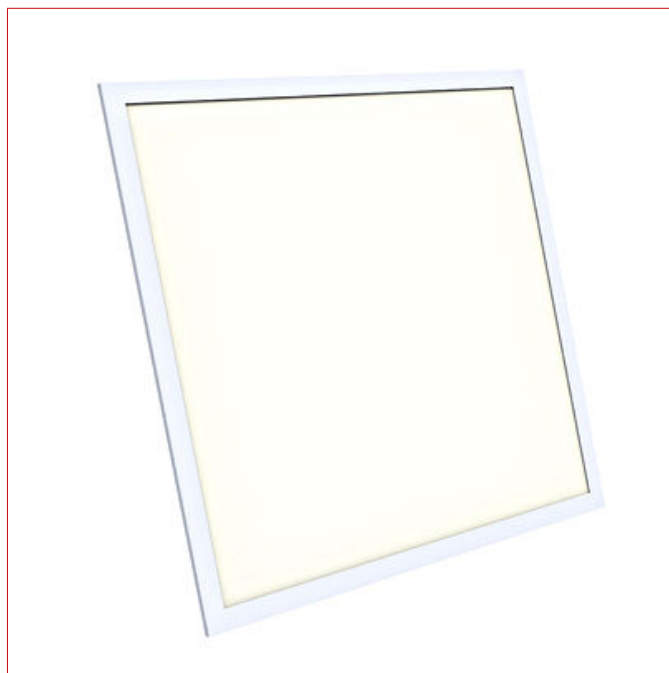

Light distribution curve




Technical Data

Net length (mm)	620,00
Net width (mm)	620,00
Net height (mm)	10,00
Net weight (kg)	2,05

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	30
Luminaire type	LED Panel
Mounting	surface mounting ceiling surface mounting with pendant Einlegeleuchte für Rasterdecken recessed mounting ceiling
Colour	White
Material	Aluminum PMMA
Beam angle (°)	90
Glare factor (UGR)	<19
Operation current mA (mA)	850
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	33
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	3960
Service life	50.000h / L70 / B50
Dimmable	Depending on driver
Protection class	III
IP Rating	IP20, IP40 optical part
Illuminant incl.	yes
LxWxH mm	620x620x10

Dimensioned drawing: LANO 4 LED 33W 840 3960lm 850mA M625 UGR<19 microprism cover

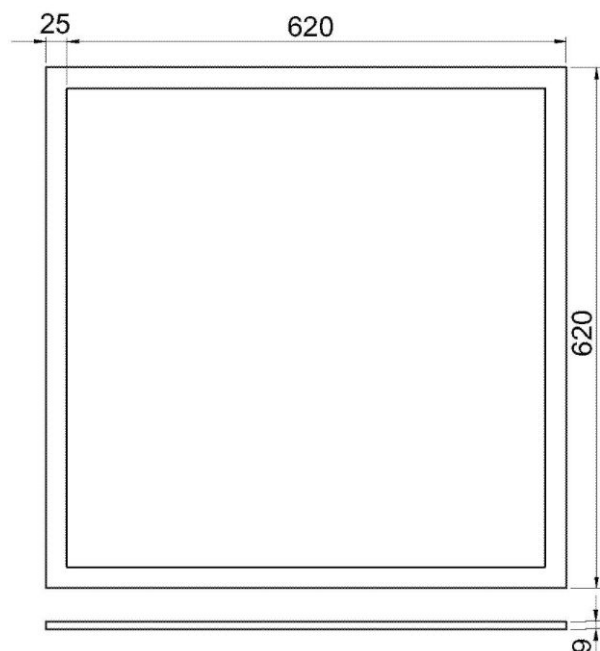

Article Table

DESCRIPTION	Order No.
LANO 4 LED 33W 840 3960lm 850mA M625 UGR<19 microprism cover	LITP0011
LED panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030 (DALI, Push Dim)	
Optional Accessories	
LED Driver 33W 850mA on/off for series LANO 4 LED flickerfree	LITP0029
LED DALI-2 Driver 33W 850mA for Serie LANO 4 LED DALI und Push Dim	LITP0030-A
Ceiling Mounting Frame for LED Panels series LANO 4 M625 Surface Mount Kit	LIMK003
3-way connection box, IP20, Quick Fix	LID15379
Emergency LED module 3H for LED Panel LANO 4 30-40W	LITP0032
Suspension kit for LED Panels series LANO 4 4 point rope suspension, rope length 1 meter	LITP0024