
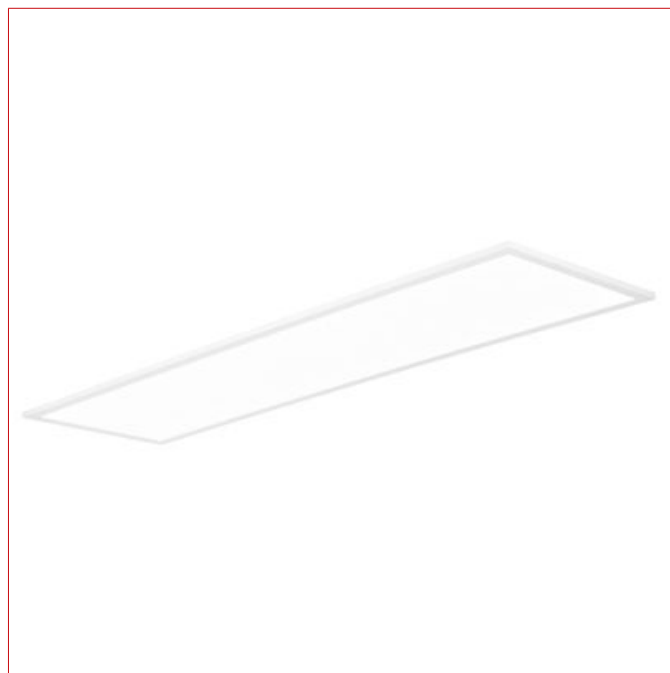


Data Sheet for Article: LITP0016--


LANO 4 LED 40W 830 4000lm 1000mA

M1250 opal cover

LED panel, can be combined with LED drivers LITP0028 (on/off) or LITP0031 (DALI, Push Dim)

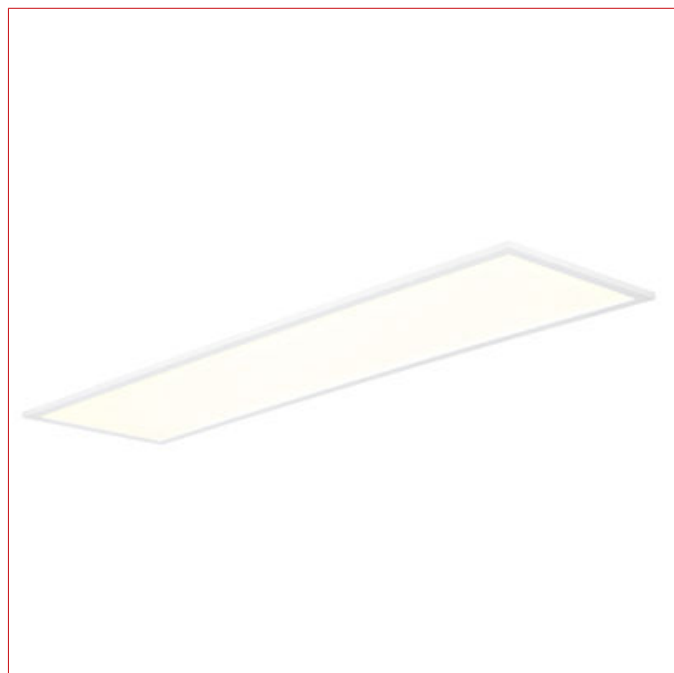

Light distribution curve




Technical Data

Net length (mm)	1.245,00
Net width (mm)	305,00
Net height (mm)	10,00
Net weight (kg)	2,37

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	30
Luminaire type	LED Panel
Mounting	surface mounting ceiling surface mounting with pendant Einlegeleuchte für Rasterdecken recessed mounting ceiling
Colour	White
Material	Aluminum PMMA
Beam angle (°)	120
Glare factor (UGR)	<22
Operation current mA (mA)	1000
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	40
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	4000
Service life	50.000h / L70 / B50
Dimmable	Depending on driver
Protection class	III
IP Rating	IP20, IP40 optical part
Illuminant incl.	yes
LxWxH mm	1245x305x10
Cut-out size (mm)	285x1225
Cut-out size mm	285x1225

Dimensioned drawing: LANO 4 LED 40W 830 4000lm 1000mA M1250 opal cover

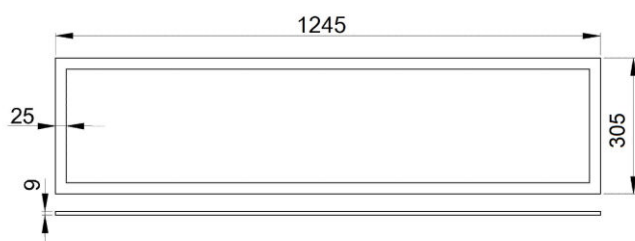

Article Table

DESCRIPTION	Order No.
LANO 4 LED 40W 830 4000lm 1000mA M1250 opal cover	LITP0016
LED panel, can be combined with LED drivers LITP0028 (on/off) or LITP0031 (DALI, Push Dim)	
Optional Accessories	
LED Driver 40W 1000mA ON/OFF, for series LANO 4 and BL flickerfree	LITP0028
LED driver 40W 1000mA DALI-2 AC/DC für Serie LANO DALI und Push Dim	LITP0031-B
Ceiling Mounting Frame for LED Panels series LANO 4 M1250 Surface Mount Kit	LIMK004
3-way connection box, IP20, Quick Fix	LID15379
Emergency LED module 3H for LED Panel LANO 4 and BL, 30-40W	LITP0032
Suspension kit for LED Panels series LANO 4 4 point rope suspension, rope length 1m	LITP0024