

Data Sheet for Article: LITP0045--


CAPRI LED Basic 200W 22000lm 4000K

asymmetric IP65 black

LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h)
170-300VDC suitable



Light distribution curve

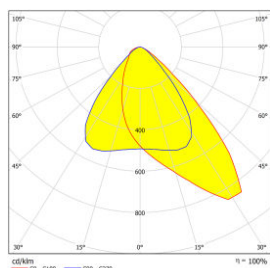


Technical Data

Net length (mm)	310,00
Net width (mm)	60,00
Net height (mm)	360,00
Net weight (kg)	4,86
Min. ambient temperature (°C)	-35
Max. ambient temperature (°C)	40
Luminaire type	Floodlight
Mounting	surface mounting ceiling surface mounting wall floor mounting
Temperature range - Operation (°C)	-35 to +40
Colour	Black
Material	Hardened steel Die-cast aluminum
Surge protection (kV)	4
Cover	Clear
Beam angle (°)	80x40
Input voltage AC (V)	120 - 277
Input voltage DC (V)	max. 10h, 170 - 300
Light source	LED
Lamp holder	LED Platine
Power (W)	200
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤6
Luminous flux (lm)	22000
Service life	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65

Technical Data - continued

Shock strength	IK07
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	310x60x360
Numbers of luminars per MCB B10	2
Numbers of luminars per MCB B16	3
Numbers of luminars per MCB B25	5
Numbers of luminars per MCB C10	3
Numbers of luminars per MCB C16	5
Numbers of luminars per MCB C25	8

Dimensioned drawing: CAPRI LED Basic 200W 22000lm 4000K asymmetric IP65 black

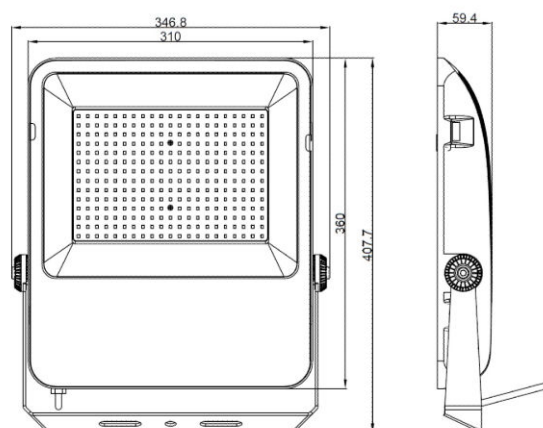

DESCRIPTION	Order No.
CAPRI LED Basic 200W 22000lm 4000K asymmetric IP65 black	LITP0045
LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h) 170-300VDC suitable	