

Data Sheet for Article: LITP0053--


LANO BL LED 33W 830 4300lm 850mA M625

UGR<19 microprism cov

LED Backlit Panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030-A (DALI, Push Dim)



Light distribution curve




Technical Data

Net length (mm)	620,00
Net width (mm)	620,00
Net height (mm)	30,00
Net weight (kg)	2,90

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	LED Panel
Mounting	surface mounting ceiling Einlegeleuchte für Rasterdecken recessed mounting ceiling
Colour	White
Material	sheetsteel
Glare factor (UGR)	<19
Operation current mA (mA)	850
Lamp holder	LED Platine
System efficiency (lm/W)	135lm/w
Power (W)	33
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤3
Luminous flux (lm)	4300
Service life	50.000h / L70 / B50
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20, IP40 optical part
Illuminant incl.	yes
LxWxH mm	620x620x30

Dimensioned drawing: LANO BL LED 33W 830 4300lm 850mA M625 UGR<19 microprism cov

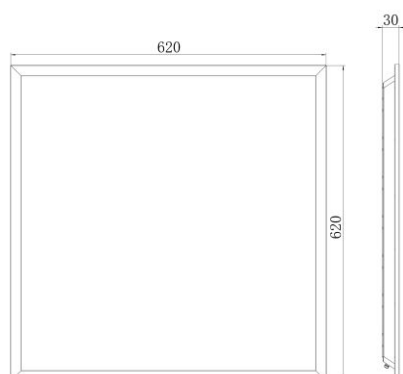

Article Table

DESCRIPTION	Order No.
LANO BL LED 33W 830 4300lm 850mA M625 UGR<19 microprism cov	LITP0053
LED Backlit Panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030-A (DALI, Push Dim)	
Optional Accessories	
LED Driver 33W 850mA on/off for series LANO 4 and BL flickerfree	LITP0029
LED driver 33W 850mA DALI-2 AC/DC für Serie LANO DALI und Push Dim	LITP0030-B
3-way connection box, IP20, Quick Fix	LID15379
Emergency LED module 3H for LED Panel LANO 4 and BL, 30-40W	LITP0032