


Data Sheet for Article: LITP0056--


LANO BL LED 40W 840 4000lm 1000mA

M600 opal cover

LED Backlit Panel, can be combined with LED drivers LITP0028 (on/off) or LITP0031-A (DALI, Push Dim)

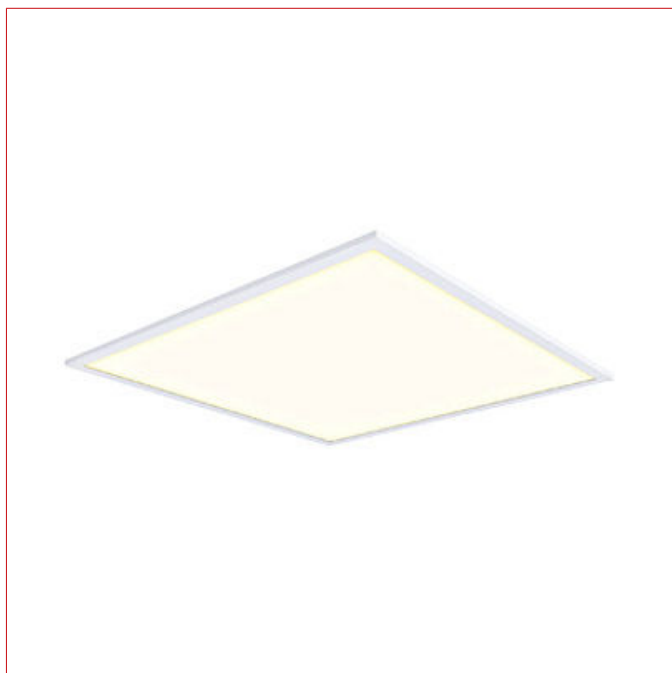

Light distribution curve




Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	30,00
Net weight (kg)	2,05

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	LED Panel
Mounting	surface mounting ceiling Einlegeleuchte für Rasterdecken recessed mounting ceiling
Colour	White
Material	sheetsteel
Glare factor (UGR)	<22
Operation current mA (mA)	1000
Lamp holder	LED Platine
System efficiency (lm/W)	100lm/w
Power (W)	40
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤3
Luminous flux (lm)	4000
Service life	50.000h / L70 / B50
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20, IP40 optical part
Illuminant incl.	yes
LxWxH mm	595x595x30

Dimensioned drawing: LANO BL LED 40W 840 4000lm 1000mA M600 opal cover

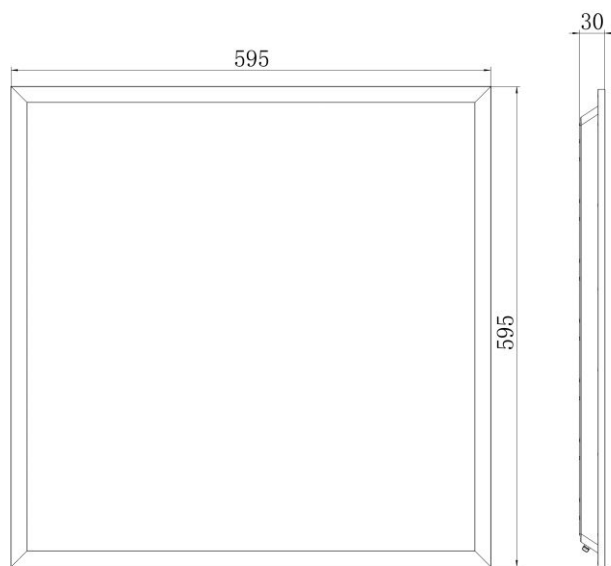

Article Table

DESCRIPTION	Order No.
LANO BL LED 40W 840 4000lm 1000mA M600 opal cover	LITP0056
LED Backlit Panel, can be combined with LED drivers LITP0028 (on/off) or LITP0031-A (DALI, Push Dim)	
Optional Accessories	
LED Driver 40W 1000mA on/off, for series LANO 4 and BL flickerfree	LITP0028
LED Driver DALI-2 40W 1000mA for Serie LANO 4 LED DALI und Push Dim	LITP0031-A
Mounting frame for plasterboard for LANO LED M600	LIG1000605
3-way connection box, IP20, Quick Fix	LID15379
Emergency LED module 3H for LED Panel LANO 4 and BL, 30-40W	LITP0032
Ceiling Mounting Frame for LED Panels series LANO BL M600 Surface Mount Kit	LIMK005