
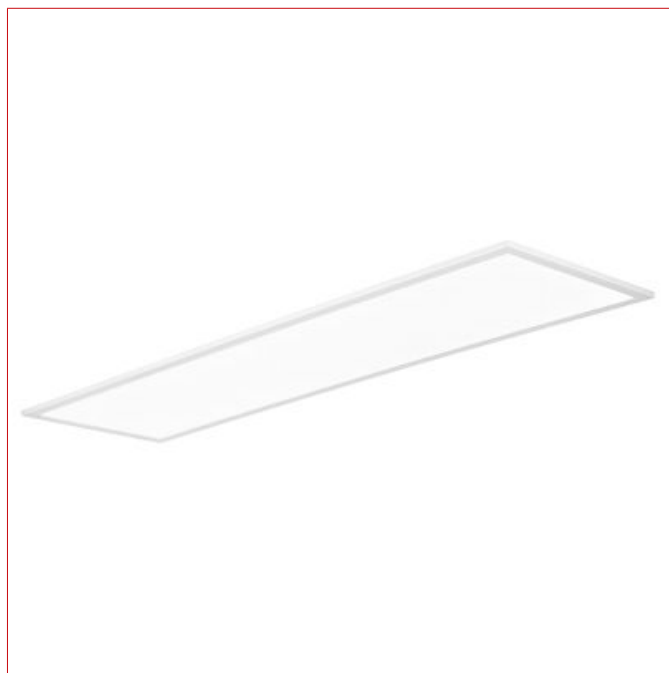


Data Sheet for Article: LITP0061--


LANO BL LED 33W 830 4300lm 850mA

M1200 UGR19 MP cover

LED Backlit Panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030-A (DALI, Push Dim)

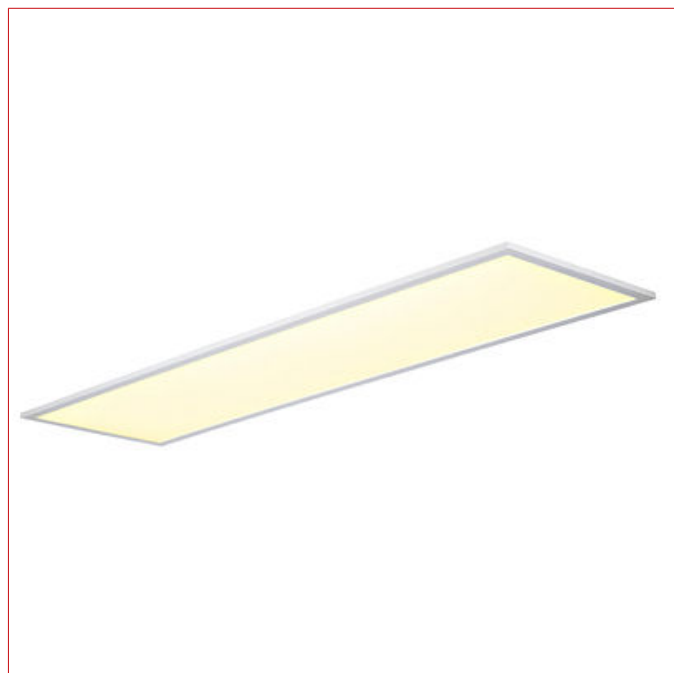

Light distribution curve




Technical Data

Net length (mm)	1.195,00
Net width (mm)	295,00
Net height (mm)	30,00
Net weight (kg)	2,21

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	LED Panel
Mounting	Einlegeleuchte für Rasterdecken
Colour	White
Material	sheetsteel
Glare factor (UGR)	<19
Operation current mA (mA)	850
Lamp holder	LED Platine
System efficiency (lm/W)	130
Power (W)	33
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤3
Luminous flux (lm)	4300
Service life	50.000h / L70 / B50
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20, IP40 optical part
Illuminant incl.	yes
LxWxH mm	1195x295x30

Dimensioned drawing: LANO BL LED 33W 830 4300lm 850mA M1200 UGR19 MP cover

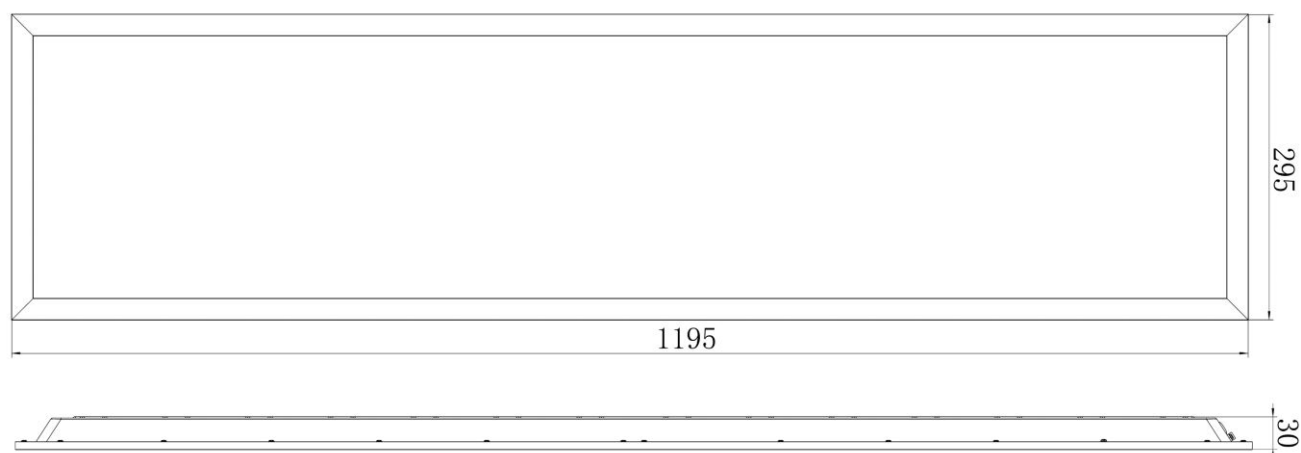

Article Table

DESCRIPTION	Order No.
LANO BL LED 33W 830 4300lm 850mA M1200 UGR19 MP cover	LITP0061
LED Backlit Panel with microprism cover, can be combined with LED drivers LITP0029 (on/off) or LITP0030-A (DALI, Push Dim)	
Optional Accessories	
LED Driver 33W 850mA on/off for series LANO 4 LED flickerfree	LITP0029
LED driver 33W 850mA DALI-2 AC/DC für Serie LANO DALI und Push Dim	LITP0030-B
3-way connection box, IP20, Quick Fix	LID15379
Emergency LED module 3H for LED Panel LANO 4 30-40W	LITP0032
Ceiling Mounting Frame for LED Panels series LANO BL M1200 Surface Mount Kit	LIMK006