

Data Sheet for Article: LITP0078--


CAPRI LED Basic 150W 16500lm 4000K

asymmetric IP65 black

LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h)
170-300VDC suitable



Light distribution curve




Technical Data

Net length (mm)	260,00
Net width (mm)	60,00
Net height (mm)	300,00
Net weight (kg)	3,83
Min. ambient temperature (°C)	-35
Max. ambient temperature (°C)	40
Luminaire type	Floodlight

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall floor mounting
Colour	Black
Material	Hardened steel Die-cast aluminum
Surge protection (kV)	4
Cover	Clear
Beam angle (°)	80x40
Lamp holder	LED Platine
Power (W)	150
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcM)	≤6
Luminous flux (lm)	16500
Service life	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	E
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	260x60x300

Dimensioned drawing: CAPRI LED Basic 150W 16500lm 4000K asymmetric IP65 black

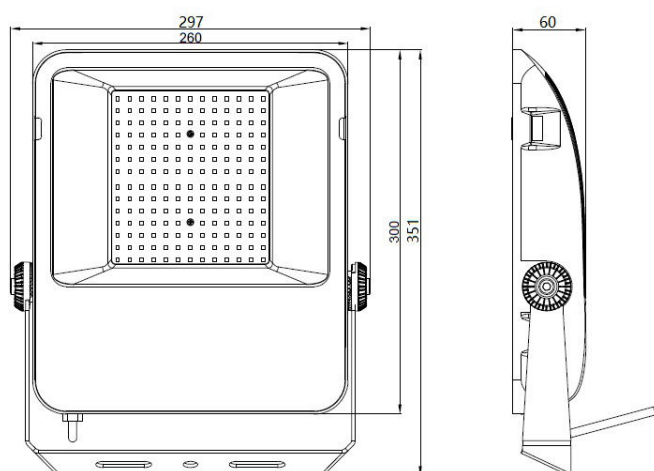

DESCRIPTION	Order No.
CAPRI LED Basic 150W 16500lm 4000K asymmetric IP65 black LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h) 170-300VDC suitable	LITP0078