

Data Sheet for Article: LITP0081--

CAPRI LED Basic 150W 18000lm 3000K symmetric IP65 black

LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h)
170-300VDC suitable




Technical Data

Net length (mm)	260,00
Net width (mm)	60,00
Net height (mm)	300,00
Net weight (kg)	3,83
Min. ambient temperature (°C)	-35
Max. ambient temperature (°C)	40
Luminaire type	Floodlight
Mounting	surface mounting ceiling surface mounting wall floor mounting
Colour	Black
Material	Hardened steel Die-cast aluminum

Technical Data - continued

Surge protection (kV)	4
Cover	Clear
Beam angle (°)	110
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	150
Light colour	neutral white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	18000
Service life	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	E
Shock strength	IK07
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	260x60x300

Dimensioned drawing: CAPRI LED Basic 150W 18000lm 3000K symmetric IP65 black

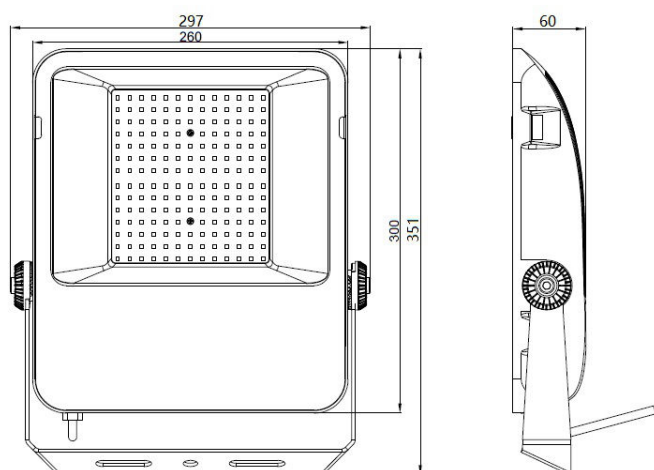

DESCRIPTION	Order No.
CAPRI LED Basic 150W 18000lm 3000K symmetric IP65 black LED flood light, continuous operation 230VAC, also for several hours operation (up to 10h) 170-300VDC suitable	LITP0081