



Data Sheet for Article: LIUS0027--

Novia FL 75W, 7727/7808lm, 930/940, UGR19, LS/PD, black

Office Free-standing luminaire, direct/indirect (50/50), dimmable, LS/PD - light sensor and presence detector



Light distribution curve




Technical Data

Net length (mm)	720,00
Net width (mm)	340,00
Net height (mm)	1.900,00
Net weight (kg)	12,50

Technical Data - continued

Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	30
Luminaire type	Free standing luminaire
Colour	Black
Glare factor (UGR)	19
Lamp holder	LED Platine
Power of system (W)	75
Power (W)	75
Light colour	neutral white warm white
Colour temperature (K)	3000/4000
Luminous flux (lm)	7727/7808
Service life	50.000h (L80/B10)
Dimmable	yes
Protection class	1
Illuminant incl.	yes
LxWxH mm	720x340x1900
Numbers of luminars per MCB B10	15
Numbers of luminars per MCB B16	24
Numbers of luminars per MCB C10	15
Numbers of luminars per MCB C16	24

Dimensioned drawing: Novia FL 75W, 7727/7808lm, 930/940, UGR19, LS/PD, black

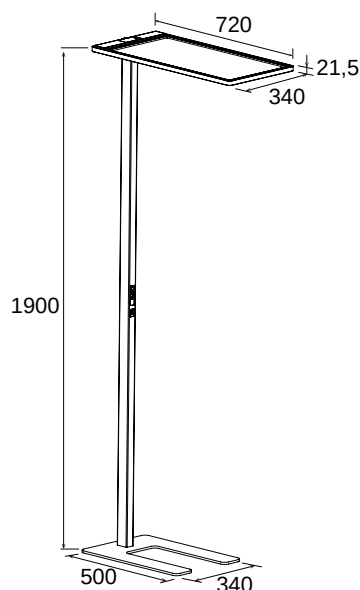

DESCRIPTION	Order No.
Novia FL 75W, 7727/7808lm, 930/940, UGR19, LS/PD, black	LIUS0027
Office Free-standing luminaire, direct/indirect (50/50), dimmable, LS/PD - light sensor and presence detector	