



Data Sheet for Article: LIUS0051--

NOVIA ROW 1200 CCT 28W 3080lm 930/940 DALI bi, IP20, L-1205

Aluminium profile luminaire with microprismatic PMMA diffuser; adjustable light colour: 3000K/4000K; adjustable power: 12W=1320lm / 18W=1980lm / 21W=2310lm / 28W=3080lm@4000K, 110lm/W@4000K

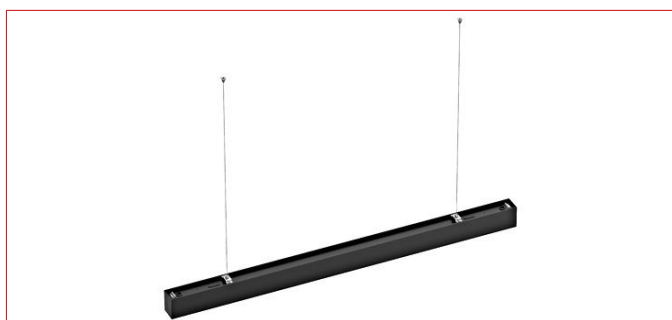

Light distribution curve




Technical Data

Net length (mm)	1.205,00
Net width (mm)	57,00
Net height (mm)	76,00
Net weight (kg)	3,00
Min. ambient temperature (°C)	-20

Technical Data - continued

Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Colour	Black
Material	Aluminum
Cover	mikroprismatic
Beam angle (°)	75
Glare factor (UGR)	UGR<19 tauglich bei 12W
Operating voltage AC (V)	220-240
Colour stability MacAdam (sdcm)	6
Power (W)	12 28 18 21
Light colour	neutral white warm white
Colour temperature (K)	4000 3000
Colour rendering index (Ra)	90
Luminous flux (lm)	3080 1320 1980 2310
Service life	50.000h
Dimmable	DALI Push to DIM
Protection class	I
IP Rating	IP20
Shock strength	IK02

NOVIA ROW 1200



Article Table

DESCRIPTION	Order No.
NOVIA ROW 1200 CCT 28W 3080lm 930/940 DALI bI, IP20, L-1205	
Aluminium profile luminaire with microprismatic PMMA diffuser; adjustable light colour: 3000K/4000K; adjustable power: 12W=1320lm / 18W=1980lm / 21W=2310lm / 28W=3080lm@4000K, 110lm/W@4000K	LIUS0051
Optional Accessories	
Indirect Modul for NOVIA ROW 1200 4.6-11W 930/940 DALI	LIUS0053
Light colour and output are controlled together with the luminaire	
NOVIA ROW Surface-mounted Mechanical Connector 2pcs	LIUS0055
NOVIA ROW Pendant Mechanical Luminaire Connector Set	LIUS0056
NOVIA ROW cable suspension without supply cable L-1500	LIUS0057
NOVIA ROW cable suspension with 5-poles supply cable L-1500 white	LIUS0058