


Data Sheet for Article: LIUS0060--

MARRA 3 COB FREE CUT 10W/m 900lm/m 4000K CRI90 24VDC IP54 5m

8 mm wide, freely cuttable, suitable for indoor use only

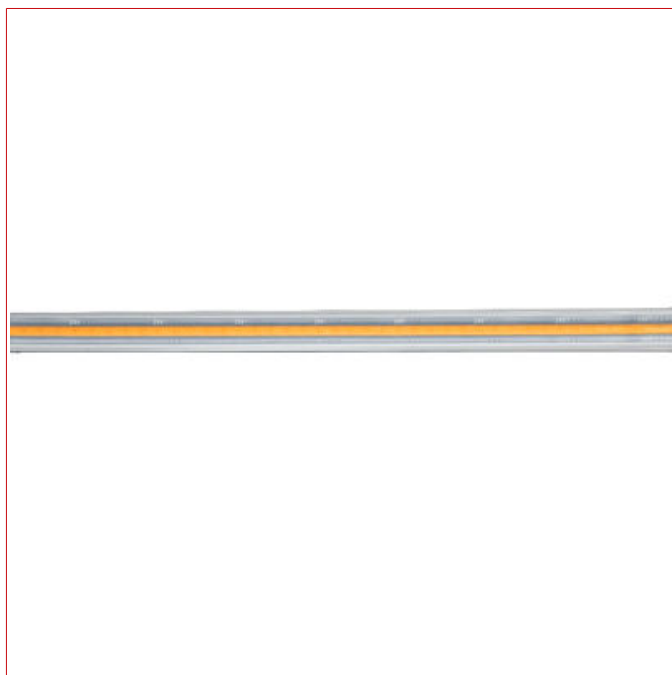


Technical Data

Net length (mm)	5.000,00
Net width (mm)	8,00
Net height (mm)	2,00
Net weight (kg)	0,06
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	LED Strip
Beam angle (°)	120
Operating voltage DC (V)	24
System efficiency (lm/W)	133
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcn)	3
luminous flux/m (lm/m)	900
Service life	50.000h / L70 / B10

Technical Data - continued

Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP54
LxWxH mm	5000x8x2

Dimensioned drawing: MARRA 3 COB FREE CUT 10W/m 900lm/m 4000K CRI90 24VDC IP54 5m

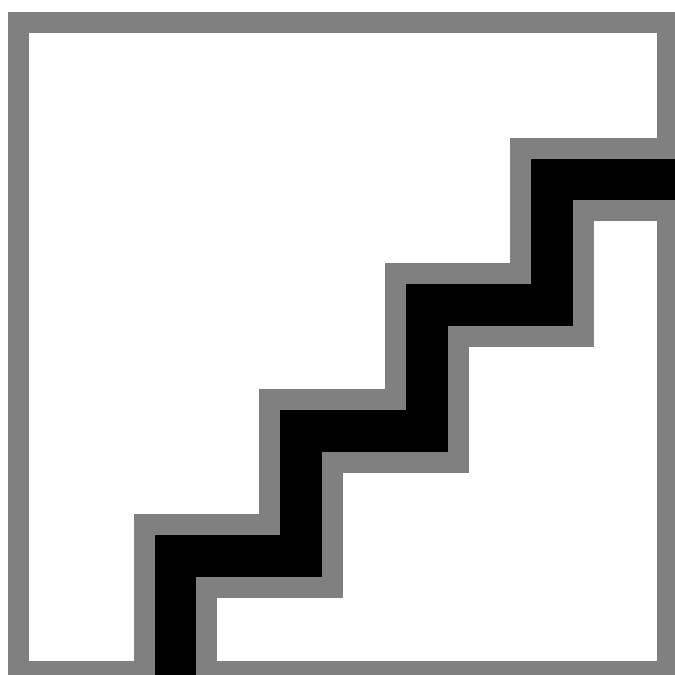

Article Table

DESCRIPTION	Order No.
MARRA 3 COB FREE CUT 10W/m 900lm/m 4000K CRI90 24VDC IP54 5m 8 mm wide, freely cuttable, suitable for indoor use only	LIUS0060
Optional Accessories	
Feed in Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0061
I-Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0062
L-Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0063
LED Power Supplies LPF 90W/24V, MM, IP67	LINT024090