


Data Sheet for Article: LIUS0064--

MARRA 3 COB FREE CUT 10W/m 900lm/m 2700K CRI90 24VDC IP54 5m

8 mm wide, freely cuttable, suitable for indoor use only

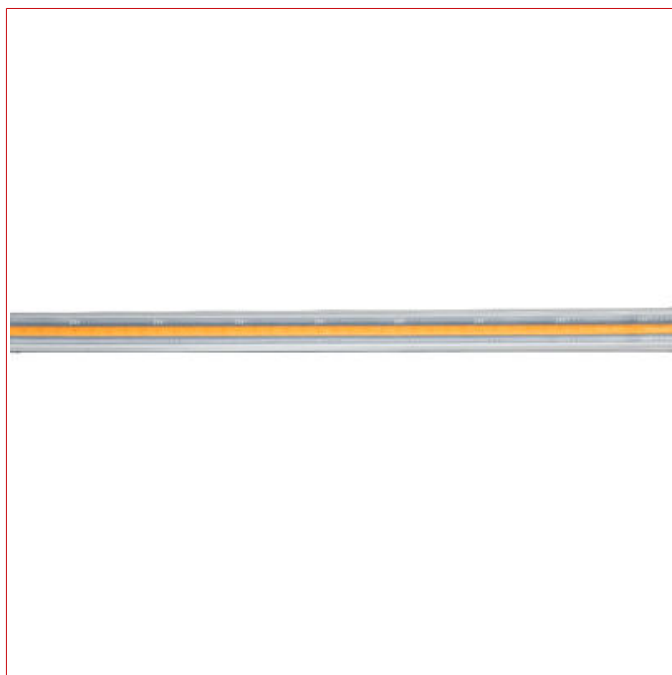


Technical Data

Net length (mm)	5.000,00
Net width (mm)	8,00
Net height (mm)	2,00
Net weight (kg)	0,06
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	45
Luminaire type	LED Strip
Temperature range - Operation (°C)	-25 to +45
Beam angle (°)	120
Operating voltage DC (V)	24
System efficiency (lm/W)	90
Light colour	warm white
Colour temperature (K)	2700
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	3
luminous flux/m (lm/m)	900
Service life	50.000h / L70 / B10

Technical Data - continued

Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP54
Illuminant incl.	yes
LxWxH mm	5000x8x2

Dimensioned drawing: **MARRA 3 COB FREE CUT 10W/m 900lm/m 2700K CRI90 24VDC IP54 5m**

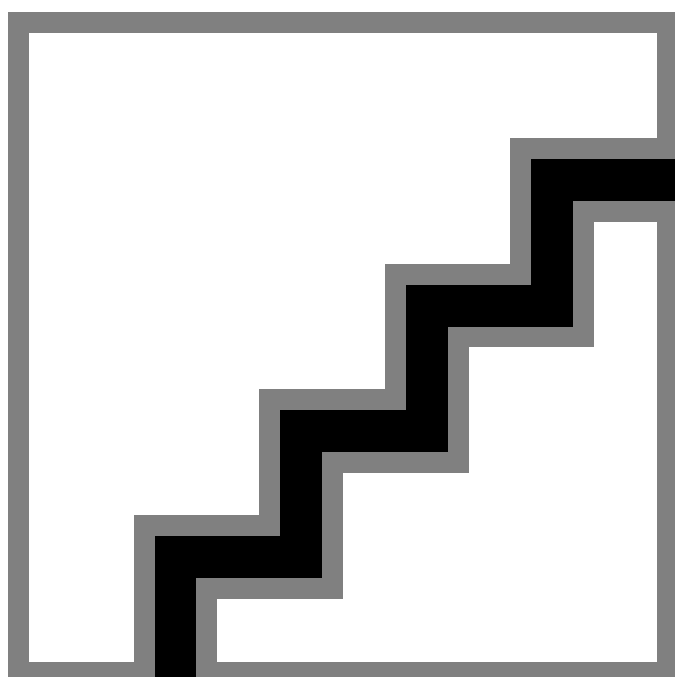

Article Table

DESCRIPTION	Order No.
MARRA 3 COB FREE CUT 10W/m 900lm/m 2700K CRI90 24VDC IP54 5m 8 mm wide, freely cuttable, suitable for indoor use only	LIUS0064
Optional Accessories	
Feed in Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0061
I-Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0062
L-Connector 2-pin 8mm for MARRA 3 COB FREE CUT	LIUS0063
LED Power Supplies LPF 90W/24V, MM, IP67	LINT024090