

Data Sheet for Article: LIUS0067--

FORTEA PRO 20/25W 2500lm 2,7/3/4K CRI80 IP65 black

Outdoor Wall- and ceiling light with adjustable power and light colour, lumen 20W= 2000lm / 25W= 2500lm @3000K




Technical Data

Net height (mm)	63,00
Net diameter (mm)	300,00
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Temperature range - Operation (°C)	-20 to +45
Colour	Black
Material	Die-cast aluminum
Cover	PC opal
Beam angle (°)	120
Controller	LED driver
Input voltage AC (V)	200-240

Technical Data - continued

Power (W)	25 20
Light colour	neutral white warm white
Colour temperature (K)	2700 4000 3000
Colour rendering index (Ra)	80
Colour stability MacAdam (sdcm)	6
Luminous flux (lm)	2500
Service life	50000
Dimmable	no
Protection class	I
IP Rating	IP65
Shock strength	IK10
Diameter (mm)	300
ØxH mm	300x63

Dimensioned drawing: FORTEA PRO 20/25W 2500lm 2,7/3/4K CRI80 IP65 black

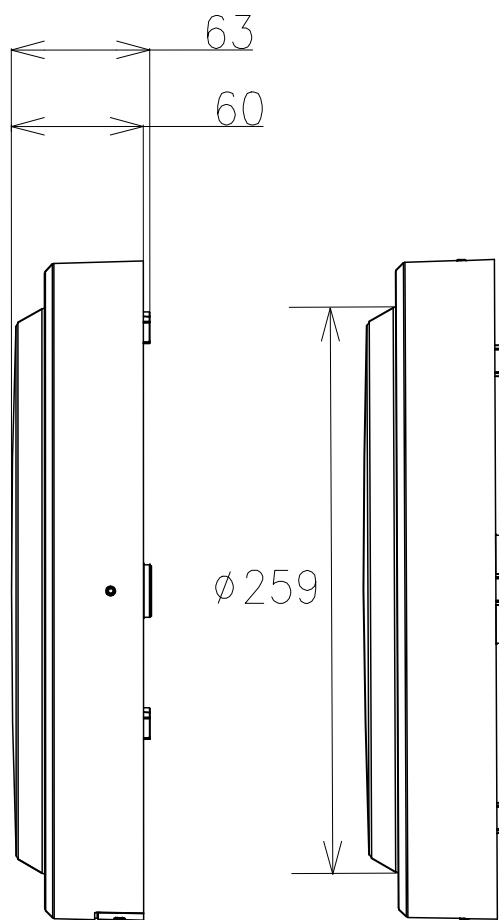

DESCRIPTION	Order No.
FORTEA PRO 20/25W 2500lm 2,7/3/4K CRI80 IP65 black	LIUS0067
Outdoor Wall- and ceiling light with adjustable power and light colour, lumen 20W= 2000lm / 25W= 2500lm @3000K	