



Data Sheet for Article: LIV2162416

LED Panel 29W 3960lm, 845, M600, white - 6 pack

not dimmable, incl. driver

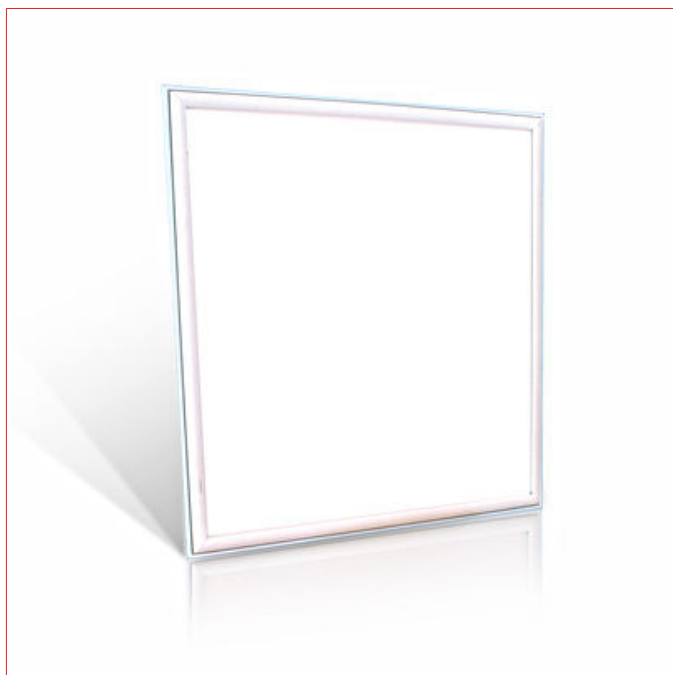

Light distribution curve




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminous flux (lm)	3960
Light colour	neutral white
Colour temperature (K)	4500
Colour rendering index (Ra)	≥80
Service life	20.000h
Dimmable	no

Technical Data - continued

Protection class	II
IP Rating	IP20
Luminaire type	LED Panel
Light source	SMD LED
Lamp holder	LED Platine
Beam angle (°)	120
System efficiency (lm/W)	124
Power (W)	29
Operating voltage AC (V)	220-240
Frequency (Hz)	60
Mounting	recessed mounting ceiling
Colour	White
Material	Aluminum PC PMMA
Cover	opal
Length (mm)	595
Width (mm)	595
Height (mm)	13
Optional Accessories	LIVT9999--; LIVT6018--; LIVT6019--; LIVT60303--; LID15379--

Dimensioned drawing: LED Panel 29W 3960lm, 845, M600, white - 6 pack

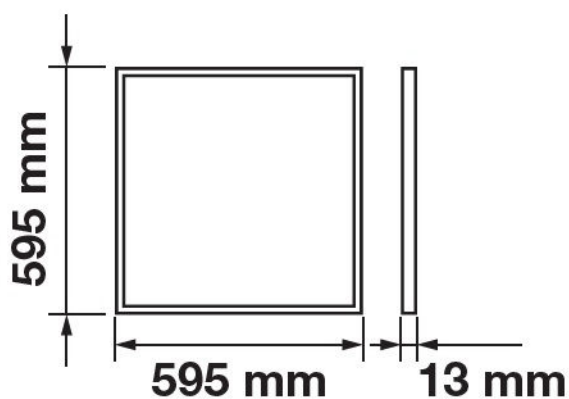

Article Table

DESCRIPTION	Order No.
LED Panel 29W 3960lm, 845, M600, white - 6 pack not dimmable, incl. driver	LIV2162416
Optional Accessories	
Housing for surface mounting Panels M600 Series V-TAC	LIVT9999
Suspended mounting kit for LED panels (KIT with 4 pcs) suitable for Panel Series V-TAC only	LIVT6018
Driver for V-TAC LED Panel 45W dimmable	LIVT6019
LED Emergency Kit for V-TACPanel 29W - 45W	LIVT60303
3-way connection box, IP20, Quick Fix	LID15379