


Data Sheet for Article: LIVB0001--

DEVO LED PRO 16W 840 1900lm 230V ECG IP65 CL 1 PMMA 669mm

moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips



Light distribution curve




Technical Data

Net length (mm)	669,00
Net width (mm)	86,00
Net height (mm)	95,00
Net weight (kg)	1,84
Min. ambient temperature (°C)	-20

Technical Data - continued

Max. ambient temperature (°C)	35
Luminaire type	wall luminaires pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Light grey
Material	Glass fibre reinforced polyester
Cover	PMMA opal
Controller	LED driver
Operating voltage AC (V)	230
Lamp holder	LED Platine
System efficiency (lm/W)	118
Power (W)	16
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1900
Service life	70.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Shock strength	IK03
Illuminant incl.	yes
LxWxH mm	669x86x95

**Dimensioned drawing: DEVO LED PRO 16W 840 1900lm 230V ECG IP65 CL 1
PMMA 669mm**

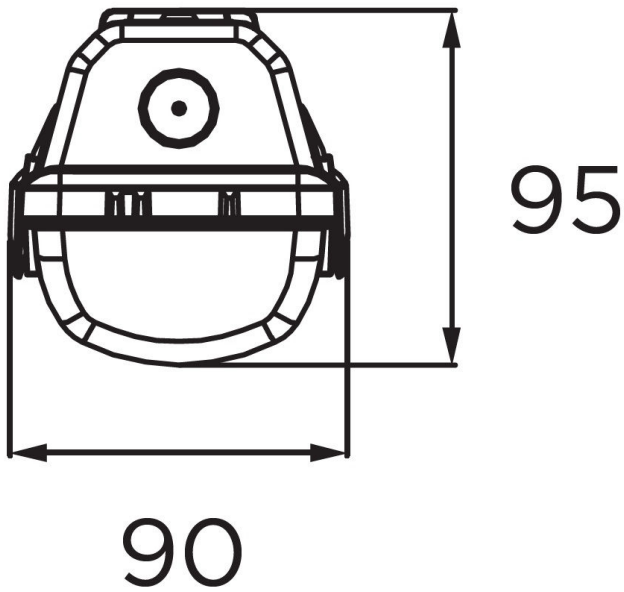

Article Table

DESCRIPTION	Order No.
DEVO LED PRO 16W 840 1900lm 230V ECG IP65 CL 1 PMMA 669mm moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips	LIVB0001
Optional Accessories	
DEVO PRO 16W Diffuser PMMA L-669mm	LIVB0006