


Data Sheet for Article: LIVB0022--

DEVO PRO II AIR 19/23/27/32W DIP Switch 840 PMMA opal IP66

LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, additionally Dip-Switchfunction: 19W-3000lm/23W-3700lm/27W-4500lm/32W-5200lm



Light distribution curve



Product Details

Devo PRO II for outdoor use; climatic spigot (membrane to compensate for temperature differences); silicone seal; UV-resistant



Technical Data

Net length (mm)	1.174,00
-----------------	----------


Technical Data - continued

Net width (mm)	102,00
Net height (mm)	90,00
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	35
Luminaire type	wall luminaire pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Light grey
Material	Glass fibre reinforced polyester
Cover	PMMA opal
Controller	LED driver AC
Operating voltage AC (V)	230
Lamp holder	LED Platine
System efficiency (lm/W)	141
Power (W)	19;23;27;32
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3000;3700;4500;5200
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP66
Shock strength	IK03
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	1174x102x90
Numbers of luminars per MCB B10	11
Numbers of luminars per MCB B16	16
Numbers of luminars per MCB C10	19
Numbers of luminars per MCB C16	27

DIP-Switch settings

DIP-Switch 1	DIP-Switch 2	Power [W]	Current [mA]
OFF	OFF	19	200
OFF	ON	23	250
ON	OFF	27	300
ON	ON	32	350

Dimensions [mm]

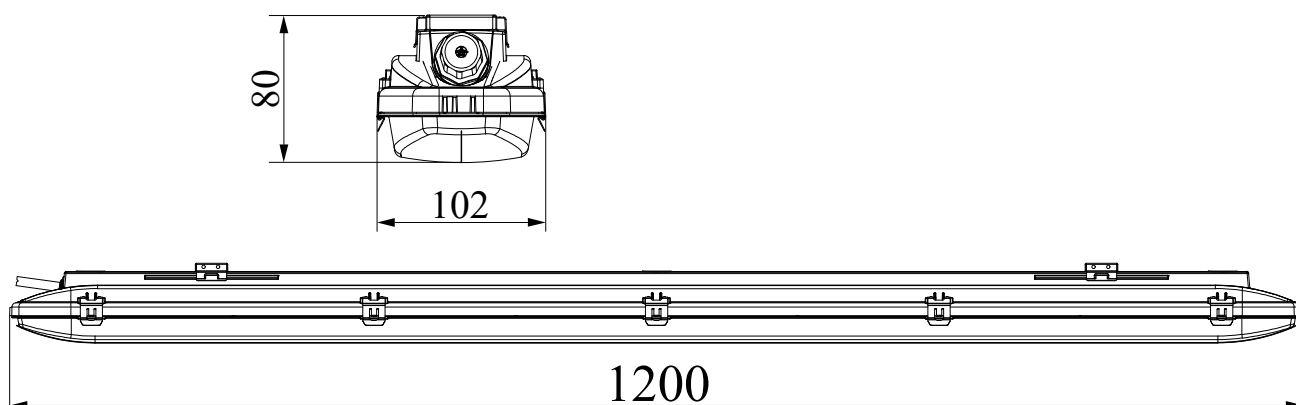

DESCRIPTION	Order No.
DEVO PRO II AIR 19/23/27/32W DIP Switch 840 PMMA opal IP66	
LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, additionally Dip-Switchfunction:	LIVB0022
19W-3000lm/23W-3700lm/27W-4500lm/32W-5200lm	