

Data Sheet for Article: LIVB0039-A


DEVO PRO II PC 32W 5300lm 840 230V IP66

CL 1 L-1200mm

LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, AC/DC driver, Dip-Switch: 25W-4200lm / 32W-5300lm / 38W-6200lm / 44W-7000lm



Light distribution curve



Technical Data


Net length (mm)	1.174,00
Net width (mm)	102,00
Net height (mm)	80,00
Net weight (kg)	1,88
Min. ambient temperature (°C)	-20

Technical Data - continued

Max. ambient temperature (°C)	35
Luminaire type	wall luminaires pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Light grey
Material	Glass fibre reinforced polyester
Cover	PC opal
Controller	LED driver AC / DC
Operating voltage AC (V)	230
Operating voltage DC (V)	198-264
Lamp holder	LED Platine
System efficiency (lm/W)	165
Power (W)	25/32/38/44
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<3
Luminous flux (lm)	4200/5300/6200/7000
Service life	50.000h / L80 / B10
Cycle of operation	100000
Dimmable	no
Protection class	I
IP Rating	IP66
Shock strength	IK08
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	1174x102x80
Numbers of luminars per MCB B10	22
Numbers of luminars per MCB B16	34
Numbers of luminars per MCB B20	42
Numbers of luminars per MCB B25	53
Numbers of luminars per MCB C10	33
Numbers of luminars per MCB C13	45
Numbers of luminars per MCB C16	54
Numbers of luminars per MCB C20	70
Numbers of luminars per MCB C25	88

Dimensioned drawing: DEVO PRO II PC 32W 5300lm 840 230V IP66 CL 1 L-1200mm

[mm]

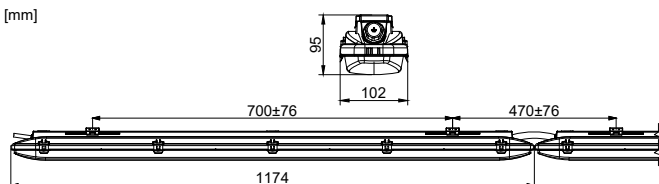

Article Table

DESCRIPTION	Order No.
DEVO PRO II PC 32W 5300lm 840 230V IP66 CL 1 L-1200mm	
LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, AC/DC driver, Dip-Switch:	LIVB0039-A
25W-4200lm / 32W-5300lm / 38W-6200lm / 44W-7000lm	
Optional Accessories	
Cover PMMA Opal for DEVO PRO II 1200mm	LIVB0024
Cover PC Opal for DEVO PRO II 1200mm	LIVB0026
Ceiling bracket for DEVO PRO	LIVB0036
Linux mounting bracket for DEVO PRO, 10 pieces	LIVB0037
LINDA mounting set 45° for T5/T8	LI2JLT0450
LINDA wall mounting set 90° for 18/36/58W	LI2JLT0452
Holder for wire rope with Ø 1,5 - 2,5mm	LI00501005
for Series Arktur Eco	
Wire rope with loop Length 3000 mm Ø 2mm	LI00573961
for Serie ARKTUR ECO	
L-SE Chain KE galvanized	LI8B000068