


Data Sheet for Article: LIVB0040--

DEVO PRO II PC 44W 6300lm 840 230V EVG IP66 SK 1 L-1500mm

LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, AC/DC driver, additionally Dip-Switch 30W-4400lm 37W-5400 51W-7000lm built-in



Light distribution curve



Technical Data

Net length (mm)	1.454,00
Net width (mm)	102,00
Net height (mm)	80,00
Net weight (kg)	2,22

Technical Data - continued


Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	35
Luminaire type	wall luminaires pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Light grey
Material	Glass fibre reinforced polyester
Cover	PC opal
Controller	LED driver AC / DC
Operating voltage AC (V)	230
Operating voltage DC (V)	198-264
Lamp holder	LED Platine
System efficiency (lm/W)	143
Power (W)	37W 44W 30W 51W
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<3
Luminous flux (lm)	4400/5400/6300/7000
Service life	50.000h / L80 / B10
Cycle of operation	100000
Dimmable	no
Protection class	I
IP Rating	IP66
Shock strength	IK08
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	1454x102x80
Numbers of luminars per MCB B10	15
Numbers of luminars per MCB B13	20
Numbers of luminars per MCB B16	25
Numbers of luminars per MCB B20	31
Numbers of luminars per MCB B25	39
Numbers of luminars per MCB C10	24
Numbers of luminars per MCB C13	33
Numbers of luminars per MCB C16	38
Numbers of luminars per MCB C20	52

Technical Data - continued

Numbers of luminars per MCB C25

65

Dimensioned drawing: DEVO PRO II PC 44W 6300lm 840 230V EVG IP66 SK 1 L-1500mm

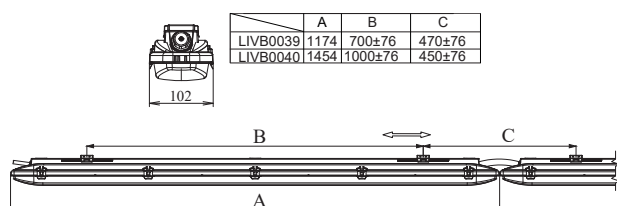

Article Table

DESCRIPTION	Order No.
DEVO PRO II PC 44W 6300lm 840 230V EVG IP66 SK 1 L-1500mm	
LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, AC/DC driver, additionally Dip-Switch	LIVB0040
30W-4400lm 37W-5400 51W-7000lm built-in	
Optional Accessories	
Cover PMMA Opal for DEVO PRO II 1500mm	LIVB0025
Cover PC Opal for DEVO PRO II 1500mm	LIVB0027
Ceiling bracket for DEVO PRO	LIVB0036
Linux mounting bracket for DEVO PRO, 10 pieces	LIVB0037
LINDA mounting set 45° for T5/T8	LI2JLT0450
LINDA wall mounting set 90° for 18/36/58W	LI2JLT0452
Holder for wire rope with Ø 1,5 - 2,5mm	LI00501005
for Series Arktur Eco	
Wire rope with loop Length 3000 mm Ø 2mm	LI00573961
for Serie ARKTUR ECO	
L-SE Chain KE galvanized	LI8B000068