


Data Sheet for Article: LIVI0005--

Solo LED 55W 830 6000lm 1500mm white



Light distribution curve




Technical Data

Net length (mm)	1.415,00
Net width (mm)	63,00
Net height (mm)	76,00
Net weight (kg)	1,93
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	wall luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall pendant

Technical Data - continued

Colour	White
Material	PC sheetsteel
Cover	opal
Manufacturer	01-Schrack-Trinity
Beam angle (°)	120
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	55
System efficiency (lm/W)	110
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	6000
Service life	30.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP20
Energy efficiency class	A+
Shock strength	IK02
Illuminant incl.	yes
LxWxH mm	1415x63x76

Dimensioned drawing: Solo LED 55W 830 6000lm 1500mm white

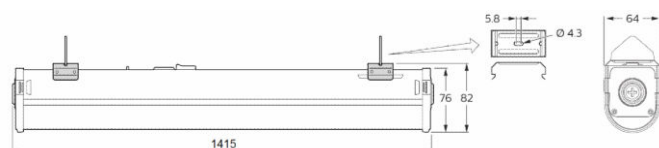

Article Table

DESCRIPTION	Order No.
Solo LED 55W 830 6000lm 1500mm white	LIVI0005