


Data Sheet for Article: LIVT20216-

Series M LED 36W 4320lm 864 220-240V IP65 IK07 120° 1200mm

Waterproof luminaire, up to 8 linked luminaires, Samsung LED chips



Light distribution curve




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Manufacturer	08-V-TAC
Luminous flux (lm)	8400
Light colour	daylight
Colour temperature (K)	6400
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6

Technical Data - continued

Service life	20.000h
IP Rating	IP65
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	110
System efficiency (lm/W)	120lm/W
Power Factor	>0.9
Power (W)	36
Operating voltage AC (V)	220-240
Frequency (Hz)	50/60
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Beige
Material	PC Stainless steel
Cover	opal
Optional Accessories	LIVT8343--

Dimensioned drawing: Series M LED 36W 4320lm 864 220-240V IP65 IK07 120° 1200mm

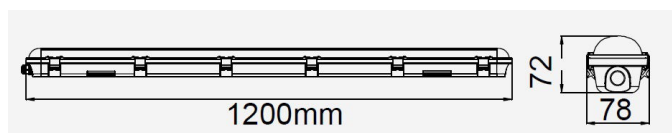

Article Table

DESCRIPTION	Order No.
Series M LED 36W 4320lm 864 220-240V IP65 IK07 120° 1200mm Waterproof luminaire, up to 8 linked luminaires, Samsung LED chips	LIVT20216
Optional Accessories	
54W Emergency kit 3h for series M LED Ni-Cd 9.6V 2200mAh	LIVT8343