

Data Sheet for Article: LIVT4861--

LED Premium Panel Downlight 18W - round

4000K, 1500lm, 120° **ECONOMY**

including driver, quick connector




Technical Data

LxWxH mm	225x225x25
ØxH mm	225x25
Cut-out size mm	Ø 210
Colour	White
Material	Aluminum PS PMMA
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 210
Watt (W)	18
Operating voltage AC (V)	200-240
Light colour	neutral white
Luminous flux (lm)	1500
Power Factor	>0.6

Technical Data - continued

Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	4000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel
Light source	SMD LED
Lamp holder	LED Platine
System efficiency (lm/W)	83
Power (W)	18
Frequency (Hz)	60
Length (mm)	225
Width (mm)	225
Height (mm)	25
Diameter (mm)	225

Dimensioned drawing: LED Premium Panel Downlight 18W - round 4000K, 1500lm, 120°

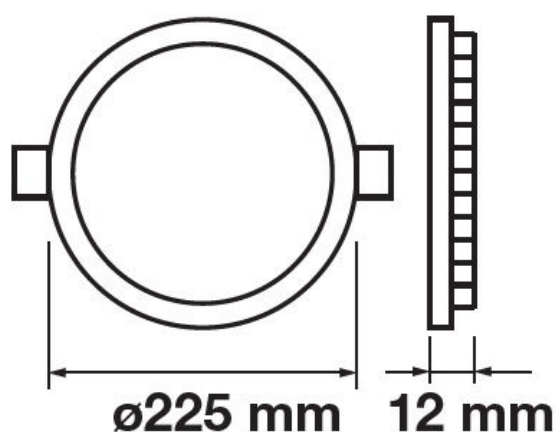

DESCRIPTION	Order No.
LED Premium Panel Downlight 18W - round 4000K, 1500lm, 120° including driver, quick connector	LIVT4861