

Data Sheet for Article: LIVT4872--

LED Premium Panel Downlight 24W - round

3000K, 2000lm, 120° **ECONOMY**

including driver, quick connector




Technical Data

LxWxH mm	300x300x25
ØxH mm	300x25
Cut-out size mm	Ø 285
Colour	White
Material	Aluminum PS PMMA
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 285
Watt (W)	24
Operating voltage AC (V)	200-240
Light colour	warm white
Luminous flux (lm)	2400
Power Factor	>0.9

Technical Data - continued

Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	3000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel
Light source	SMD LED
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	24
Frequency (Hz)	60
Length (mm)	300
Width (mm)	300
Height (mm)	25
Diameter (mm)	300

Dimensioned drawing: LED Premium Panel Downlight 24W - round 3000K, 2000lm, 120°

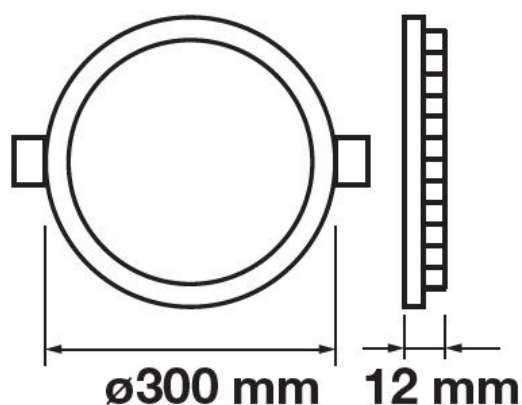

DESCRIPTION	Order No.
LED Premium Panel Downlight 24W - round 3000K, 2000lm, 120° including driver, quick connector	LIVT4872