


Data Sheet for Article: LIVT5692--

LED Floodlight 20W Green Body

4000K, 1600lm, Rechargeable, IP54 €CONOMY

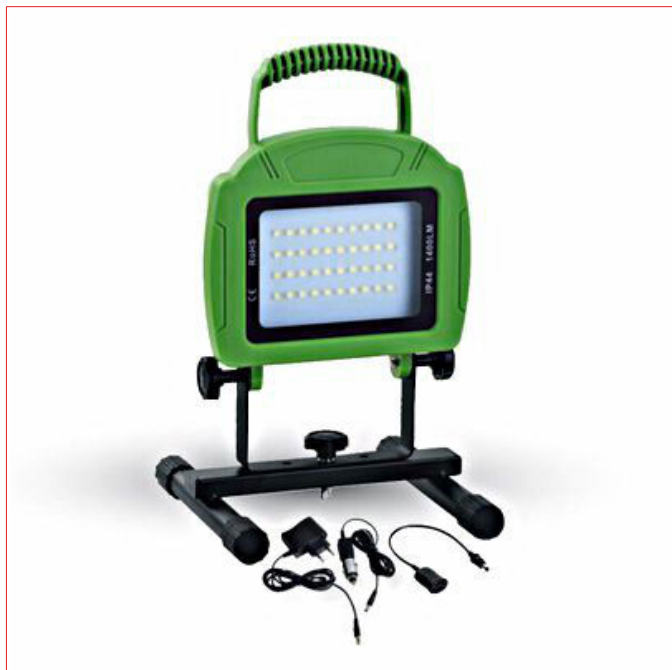

Technical Data

LxWxH mm	217x203x132
Colour	Green
Material	Aluminum
Watt (W)	20
Operating voltage AC (V)	85-265
Light colour	neutral white
Luminous flux (lm)	1600
Power Factor	>0.95
Colour rendering index (Ra)	>70
Dimmable	no
Colour temperature (K)	4000
Lamp holder	LED Platine
Light source	SMD LED
Service life	20.000h
Beam angle (°)	120

Technical Data - continued

IP Rating	IP54
Protection class	II
Comparable Wattage incandescent lamp	80
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Manufacturer	08-V-TAC
Swivel range (°)	180
Frequency (Hz)	50

Article Table

DESCRIPTION	Order No.
LED Floodlight 20W Green Body 4000K, 1600lm, Rechargeable, IP54	LIVT5692