

Data Sheet for Article: LIVT5698--

LED Floodlight 20W black/gray 4500K, 1600lm, IP44, Sensor **ECONOMY**




Technical Data

LxWxH mm	185x50x211
Colour	Black Grey
Material	Aluminum
Watt (W)	20
Operating voltage AC (V)	220-240
Light colour	neutral white
Luminous flux (lm)	1600
Power Factor	>0.95
Colour rendering index (Ra)	>70
Dimmable	no
Colour temperature (K)	4500
Lamp holder	LED Platine
Light source	SMD LED
Live time	20.000h

Technical Data - continued

Beam angle (°)	100
IP Rating	IP44
Protection class	II
Comparable Wattage incandescent lamp	100
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Manufacturer	08-V-TAC
Swivel range (°)	180
Frequency (Hz)	50

Dimensioned drawing: LED Floodlight 20W black/gray 4500K, 1600lm, IP44, Sensor

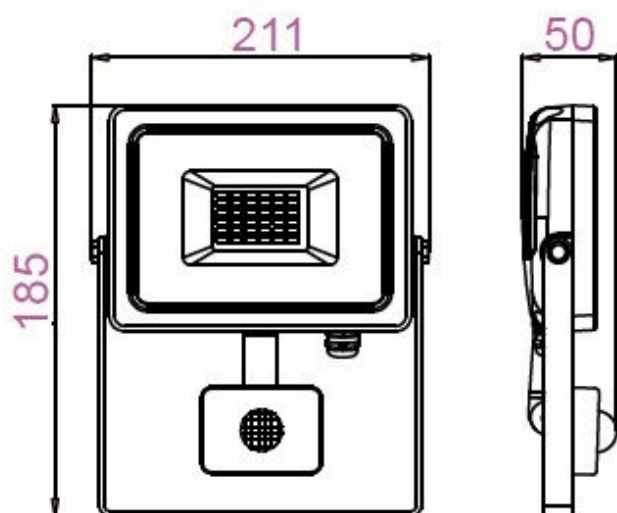

Article Table

DESCRIPTION	Order No.
LED Floodlight 20W black/gray 4500K, 1600lm, IP44, Sensor	LIVT5698