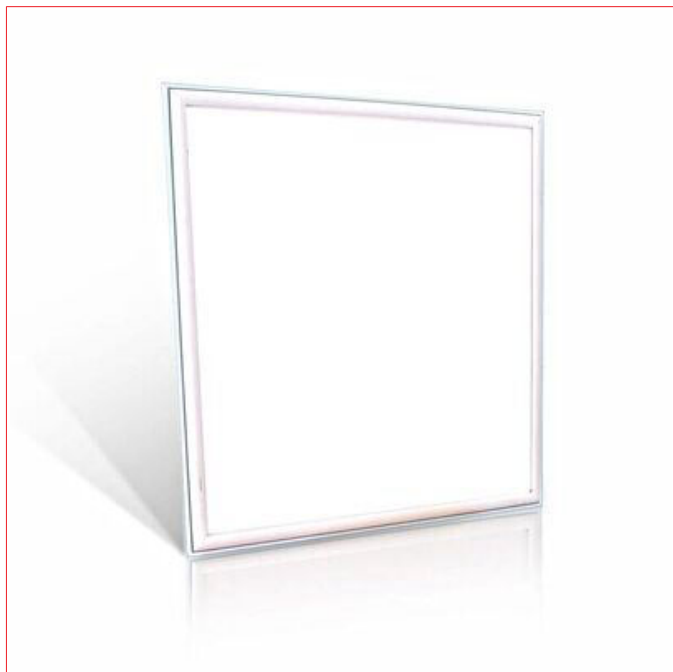


Data Sheet for Article: LIVT60286-

LED Panel 45W 3600 lm, 3000K, M600, incl driver

€CONOMY


Technical Data

LxWxH mm	595x595x14
Colour	White
Material	Aluminum PS PMMA
Mounting	recessed mounting ceiling
Watt (W)	45
Operating voltage AC (V)	100-240
Light colour	warm white
Luminous flux (lm)	3600
Power Factor	>0.9
Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	3000
Service life	20.000h

Technical Data - continued

Beam angle (°)	120
IP Rating	IP20
Protection class	II
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel
Light source	SMD LED
Lamp holder	LED Platine
System efficiency (lm/W)	80
Power (W)	45
Frequency (Hz)	50
Cover	opal
Length (mm)	595
Width (mm)	595
Height (mm)	14
Optional Accessories	LIVT9999--; LIVT6018--; LIVT6019--; LIVT60303--; LID15379--

Dimensioned drawing: LED Panel 45W 3600 lm, 3000K, M600, incl driver

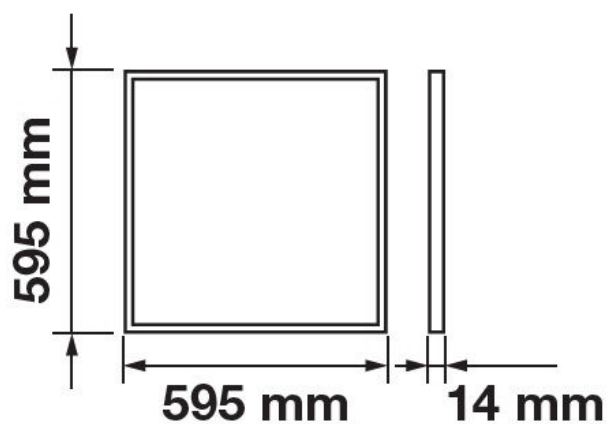

Article Table

DESCRIPTION	Order No.
LED Panel 45W 3600 lm, 3000K, M600, incl driver	LIVT60286
Optional Accessories	
Housing for surface mounting Panels M600 Series V-TAC	LIVT9999
Suspended mounting kit for LED panels (KIT with 4 pcs) suitable for Panel Series V-TAC only	LIVT6018
Driver for V-TAC LED Panel 45W dimmable	LIVT6019
LED Emergency Kit for V-TACPanel 29W - 45W	LIVT60303
3-way connection box, IP20, Quick Fix	LID15379