


Data Sheet for Article: LIVT6222--

LED recessed panel 45W 3600lm 3000K M620 220-240V IP20 120°

complete with driver

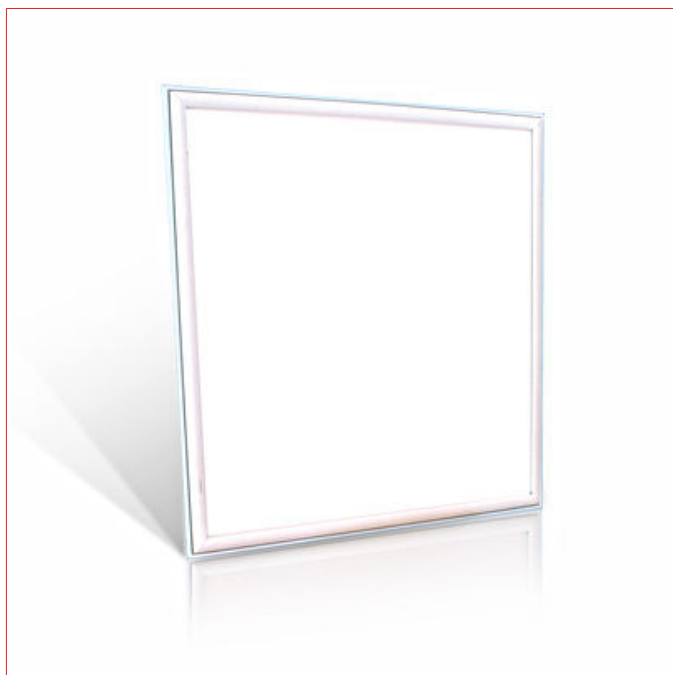


Technical Data

ØxH mm	120x37
Colour	White
Material	PP Aluminum PMMA
Mounting	recessed mounting ceiling
Watt (W)	45
Operating voltage AC (V)	220-240
Illuminant incl.	yes
Light colour	warm white
Luminous flux (lm)	3600
Power Factor	>0.9
Colour rendering index (Ra)	≥80
Colour temperature (K)	3000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Power (W)	45
Optional Accessories	LIVT6018--; LIVT6019--; LIVT60303-

Dimensioned drawing: LED recessed panel 45W 3600lm 3000K M620 220-240V IP20 120°

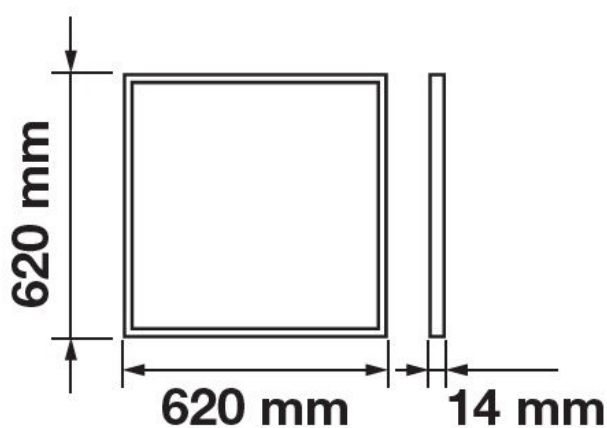

Article Table

DESCRIPTION	Order No.
LED recessed panel 45W 3600lm 3000K M620 220-240V IP20 120° complete with driver	LIVT6222
Optional Accessories	
Suspended mounting kit for LED panels (KIT with 4 pcs) suitable for Panel Series V-TAC only	LIVT6018
Driver for V-TAC LED Panel 45W dimmable	LIVT6019
LED Emergency Kit for V-TACPanel 29W - 45W	LIVT60303