



Data Sheet for Article: LIVT62406-

LED Panel 29W 3600lm, 830, M600, white

not dimmable, A++, 120lm/W, incl. driver

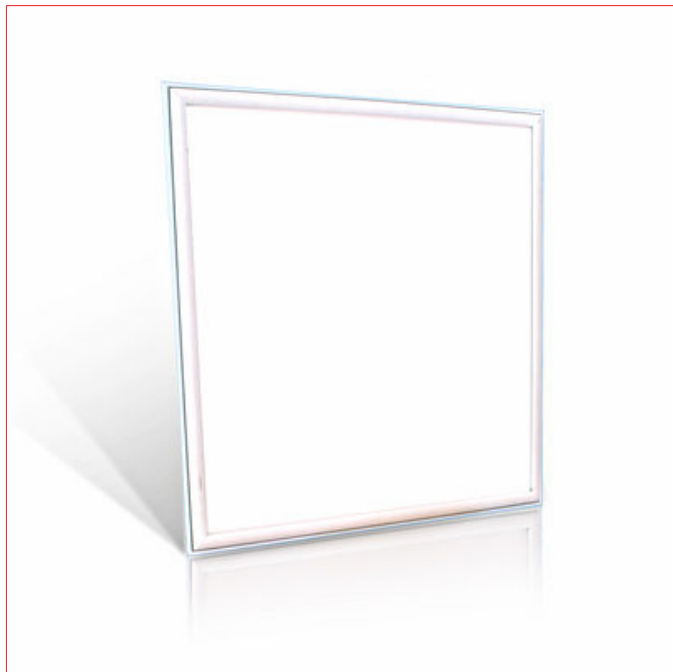

Light distribution curve




Technical Data

LxWxH mm	595x595x13
Colour	White
Material	Aluminum PC PMMA
Mounting	recessed mounting ceiling
Watt (W)	29
Manufacturer	08-V-TAC
Operating voltage AC (V)	220-240
Light colour	warm white
Luminous flux (lm)	3600
Colour rendering index (Ra)	≥80

Technical Data - continued

Energy efficiency class	A++
Dimmable	no
Colour temperature (K)	3000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel
Light source	SMD LED
Lamp holder	LED Platine
System efficiency (lm/W)	124
Power (VA) (VA)	>0.9
Frequency (Hz)	60
Cover	opal
Optional Accessories	LIVT9999--; LIVT6018--; LIVT6019--; LIVT60303--; LID15379--

Dimensioned drawing: LED Panel 29W 3600lm, 830, M600, white

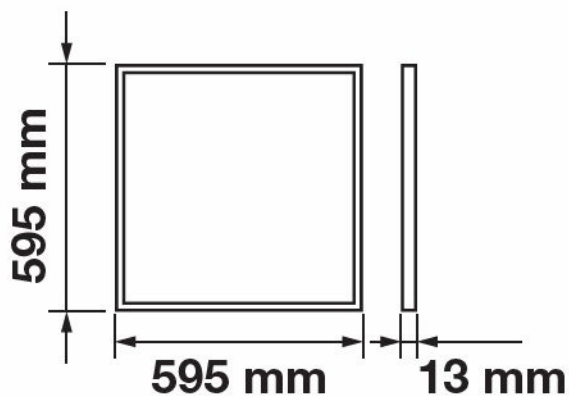

Article Table

DESCRIPTION	Order No.
LED Panel 29W 3600lm, 830, M600, white not dimmable, A++, 120lm/W, incl. driver	LIVT62406
Optional Accessories	
Housing for surface mounting Panels M600 Series V-TAC	LIVT9999
Suspended mounting kit for LED panels (KIT with 4 pcs) suitable for Panel Series V-TAC only	LIVT6018
Driver for V-TAC LED Panel 45W dimmable	LIVT6019
LED Emergency Kit for V-TACPanel 29W - 45W	LIVT60303
3-way connection box, IP20, Quick Fix	LID15379