



Data Sheet for Article: LIVT62416-

LED Panel 29W 3600lm, 840, M600, white

not dimmable, A++, 120lm/W, incl. driver

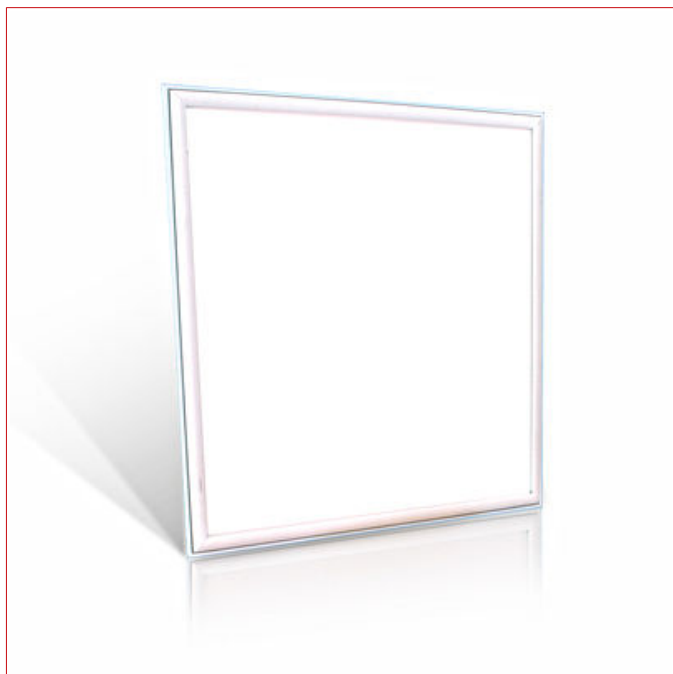

Light distribution curve




Technical Data

LxWxH mm	595x595x13
Colour	White
Material	Aluminum PC PMMA
Mounting	recessed mounting ceiling
Watt (W)	29
Operating voltage AC (V)	220-240
Illuminant incl.	yes
Light colour	neutral white

Technical Data - continued

Luminous flux (lm)	3600
Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	4000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminaire type	LED Panel
Lamp holder	LED Platine
System efficiency (lm/W)	124
Power (W)	29
Frequency (Hz)	60
Cover	opal
Length (mm)	595
Width (mm)	595
Height (mm)	13
Optional Accessories	LIMK001---; LIMK005---; LITV6018--; LITV60303-; LID 15379--

Dimensioned drawing: LED Panel 29W 3600lm, 840, M600, white

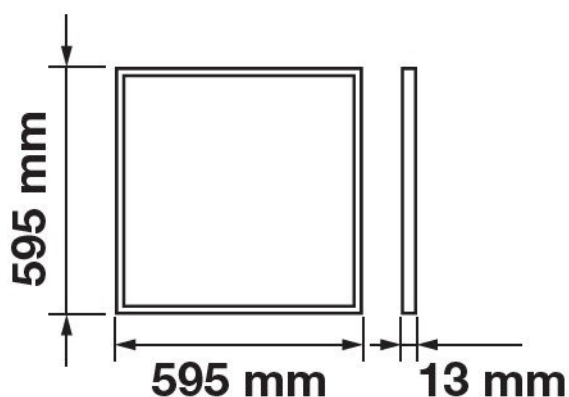

Article Table

DESCRIPTION	Order No.
LED Panel 29W 3600lm, 840, M600, white not dimmable, A++, 120lm/W, incl. driver	LIVT62416
Optional Accessories	
Ceiling Mounting Frame for LED Panels series LANO 4 M600 Surface Mount Kit	LIMK001
Ceiling Mounting Frame for LED Panels series LANO BL M600 Surface Mount Kit	LIMK005
Suspended mounting kit for LED panels (KIT with 4 pcs) suitable for Panel Series V-TAC only	LIVT6018
LED Emergency Kit for V-TACPanel 29W - 45W	LIVT60303
3-way connection box, IP20, Quick Fix	LID15379