


Data Sheet for Article: LIVTS20222

Series M LED 36W 4320lm 864 IP65 IK07 120° 1200mm, EM-Set 3h

LED Waterproof Fitting with Emergency kit 3h, Battery Ni-Cd 9.6V 2200mAh, L-1200mm



Light distribution curve




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Manufacturer	08-V-TAC
Watt (W)	36
Luminous flux (lm)	4320
Luminous flux in emergency mode (lm)	860
Emergency light	Emergency kit 3h
Light colour	daylight
Colour temperature (K)	6400
Colour rendering index (Ra)	≥80

Technical Data - continued

Colour stability MacAdam (sdcm)	<6
Service life	20.000h
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	A++ A+ A
Shock strength	IK07
Luminaire type	Moisture proof luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	110
System efficiency (lm/W)	120lm/W
Power Factor	>0.9
Operating voltage AC (V)	200-240
Frequency (Hz)	50/60
Mounting	surface mounting ceiling surface mounting wall pendant
Colour	Beige
Material	PC Stainless steel
Cover	opal

Dimensioned drawing: Series M LED 36W 4320lm 864 IP65 IK07 120° 1200mm, EM-Set 3h

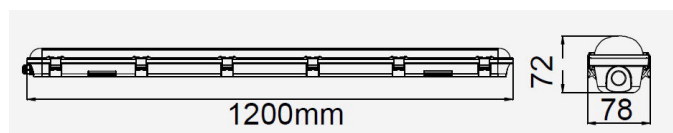

Article Table

DESCRIPTION	Order No.
Series M LED 36W 4320lm 864 IP65 IK07 120° 1200mm, EM-Set 3h	LIVTS20222
LED Waterproof Fitting with Emergency kit 3h, Battery Ni-Cd 9.6V 2200mAh, L-1200mm	