



Data Sheet for Article: LIVTS377--

VT-7-60 60W 6000lm 4000K 230V IP20 white

modular LED pendant luminaires direct/indirect distribution, incl. wire suspension

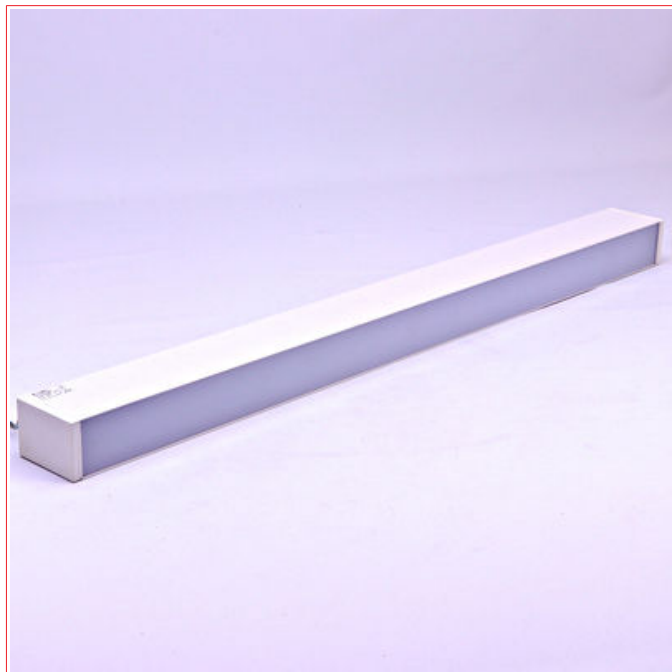

Light distribution curve




Technical Data

Manufacturer	08-V-TAC
Luminous flux (lm)	6000
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6
Service life	30.000h
Dimmable	1-10V
Protection class	I
IP Rating	IP20

Technical Data - continued

Beam angle (°)	120
Power Factor	>0,9
Power (W)	60
Operating voltage AC (V)	200-240
Colour	White
Material	Aluminum

Dimensioned drawing: VT-7-60 60W 6000lm 4000K 230V IP20 white

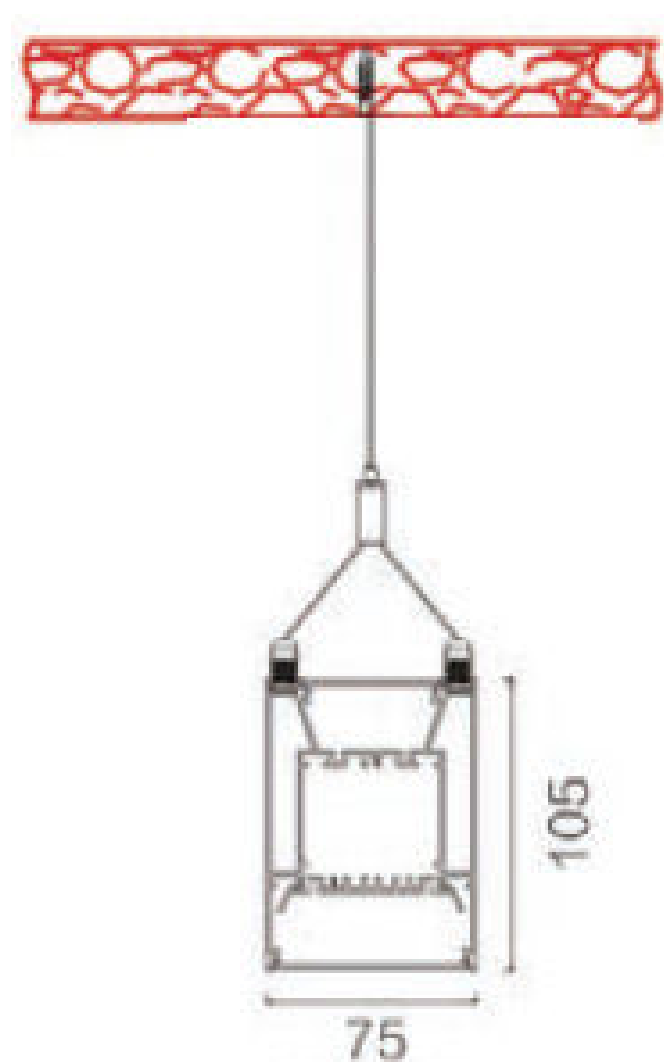

Article Table

DESCRIPTION	Order No.
VT-7-60 60W 6000lm 4000K 230V IP20 white modular LED pendant luminaires direct/indirect distribution, incl. wire suspension	LIVTS377