

Data Sheet for Article: LIVTS415--

LED Floodlight 100W 8000lm 3000K

220-240V IP65 100° white

Samsung LED chips



Technical Data


Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Manufacturer	08-V-TAC
Luminous flux (lm)	8000
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Service life	30.000h
IP Rating	IP65
Energy efficiency class	A+
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	100
Power Factor	>0.9
Power (W)	100
Operating voltage AC (V)	220-240
Colour	White

Technical Data - continued

Material

Die-cast aluminum

**Dimensioned drawing: LED Floodlight 100W 8000lm 3000K 220-240V IP65
100° white**

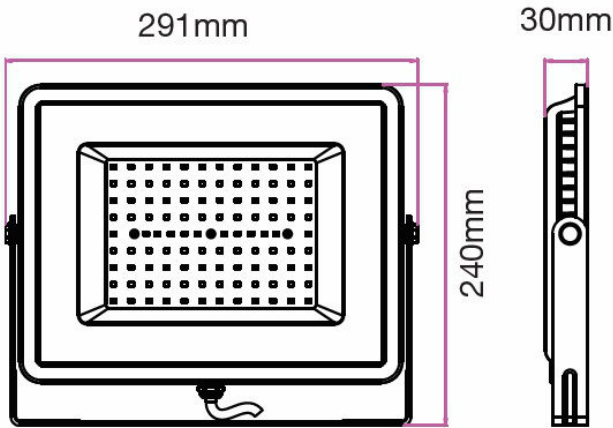

Article Table

DESCRIPTION	Order No.
LED Floodlight 100W 8000lm 3000K 220-240V IP65 100° white Samsung LED chips	LIVTS415