

Data Sheet for Article: LIVTS420--

LED Floodlight 200W white SMD 4000K, 16000lm, IP65, 100°

Outdoor Light




Technical Data

LxWxH mm	439x56x346
Colour	White
Material	Die-cast aluminum
Watt (W)	200
Operating voltage AC (V)	220-240
Illuminant incl.	yes
Light colour	neutral white
Luminous flux (lm)	16000
Power Factor	>0.9
Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	4000
Lamp holder	LED Platine
Service life	30.000h
IP Rating	IP65
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45

Technical Data - continued

Power (W)	200
Frequency (Hz)	60
	50
Length (mm)	439
Width (mm)	56
Height (mm)	346

Dimensioned drawing: LED Floodlight 200W white SMD 4000K, 16000lm, IP65, 100°

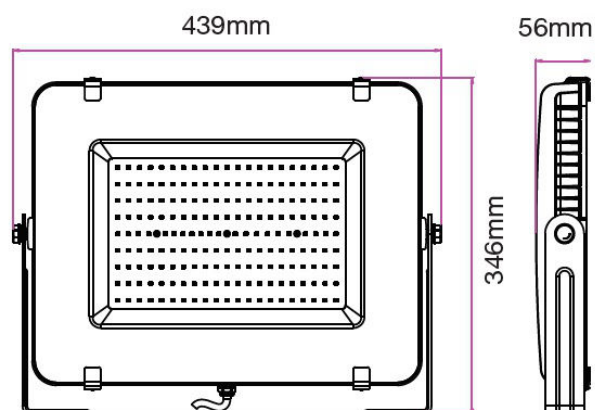

DESCRIPTION	Order No.
LED Floodlight 200W white SMD 4000K, 16000lm, IP65, 100° Outdoor Light	LIVTS420