

Data Sheet for Article: LIVTS446--

LED Floodlight 20W 1600lm 4000K 220-240V IP65 100° grey

Samsung LED chips




Technical Data

LxWxH mm	153x27x132
Colour	Grey
Material	Die-cast aluminum
Watt (W)	20
Operating voltage AC (V)	220-240
Illuminant incl.	yes
Light colour	neutral white
Luminous flux (lm)	1600
Power Factor	>0.9
Colour rendering index (Ra)	≥80
Dimmable	no
Colour temperature (K)	4000
Lamp holder	LED Platine
Service life	30.000h
Beam angle (°)	100
IP Rating	IP65
Comparable Wattage incandescent lamp	20

Technical Data - continued

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Power (W)	20
Length (mm)	153
Width (mm)	27
Height (mm)	132

Dimensioned drawing: LED Floodlight 20W 1600lm 4000K 220-240V IP65 100° grey

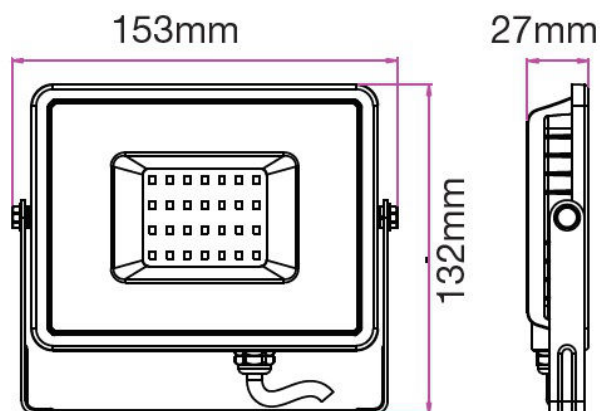

DESCRIPTION	Order No.
LED Floodlight 20W 1600lm 4000K 220-240V IP65 100° grey Samsung LED chips	LIVTS446