

Data Sheet for Article: MAIM3200F-

LED flashing light module, 230-240VAC, orange

Base required, Version flash, Make-up module, Control Constant, Voltage range AC 230-240V




Technical Data

Series	MA 230V
Version	flash
Color of LED	Orange
Voltage range (V)	AC 230-240
Make-up	module
Control	Constant
IP Rating	IP66
Diameter (mm)	70
Inlets	depends on base
Optional Accessories	MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100--
Light source	LED
Lens	Polycarbonate, ribbed inside
mounting	any

Technical Data - continued

Service life	100000
Temperature range - Operation (°C)	-30 to +60
Impact Resistance	IK08
Rated current (A)	0,01
Flash frequency (Hz)	1,40
Maximum modules used	5
Installation diameter (mm)	70
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]

Dimension

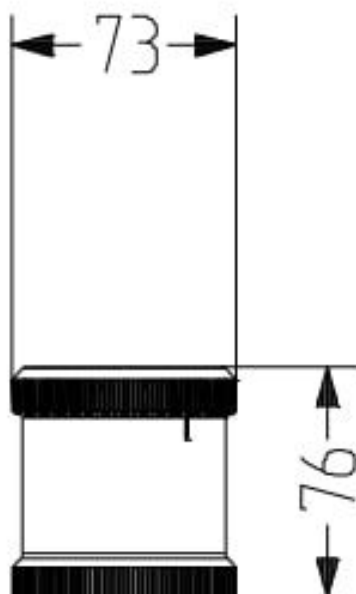

Article Table

DESCRIPTION	Order No.
LED flashing light module, 230-240VAC, orange	MAIM3200F
Base required, Version flash, Make-up module, Control Constant, Voltage range AC 230-240V	
Optional Accessories	
Standard Base for Signal Towers modular, Black	MAIB0001
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp	
Vertical Base for Signal Towers modular, Black	MAIB0002
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp	
Tube base for Signal Towers,Alu-tube with plastic foot,100mm	MAIR0001
1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp	
Multi-tone siren, 8 tones, 24V AC/DC	MAIA3100
Base required, only mountable as top modul, Version Multi Tone, Make-up module, Control Dip switch, Voltage range AC/DC 24V	