

Switch Disconnecter, 4-pole, 63A - not remotely releasable

Device category switch disconnector, not remotely releaseable, Size type 1, Rated current 63A, Poles 4, IP Rating IP20, Tripping Unit without protection




Technical Data

Net width (mm)	120,00
Net height (mm)	145,00
Net weight (kg)	1,21
EAN	9004840385816
Power loss (W)	6,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Device category	switch disconnector, not remotely releaseable
Rated current (A)	63
Size type	1
Tripping Unit	without protection
Poles	4
Standard	IEC EN 60947 VDE 0660
Short-circuit protection maximum fuse	125
Protection against electrical shock	Back-of-hand-proof

Technical Data - continued

Climatic proofing	Damp heat, constant, to IEC 60068-2-78
Temperature range - Transport/storage (°C)	-40 to +70
Temperature range - Operation (°C)	-25 to +70
Mech. shock resistance Half-sinusoidal shock 10ms	20
IP Rating	IP20
Rated operational voltage (V)	690
Rated frequency (Hz)	50/60
Rated operational current (A)	63
Overvoltage category/pollution degree	III/3
Rated insulation voltage [Ui] (V)	690
Short circuit making capacity (kA)	2,80
Mechanical durability	20000 operation cycles
AC-1	
400 V	10000
415 V	10000
660 V 690 V (A)	7500
AC-23A	1000
Terminal type	Frame clamp
Terminal cross section	
Solid [main cable] (mm²)	2 x (6 - 16)
Stranded [main cable] (mm²)	2 x (6 - 25)
Mounting type	vertical

Dimensioned drawing: Switch Disconnecter, 4-pole, 63A - not remotely releasable

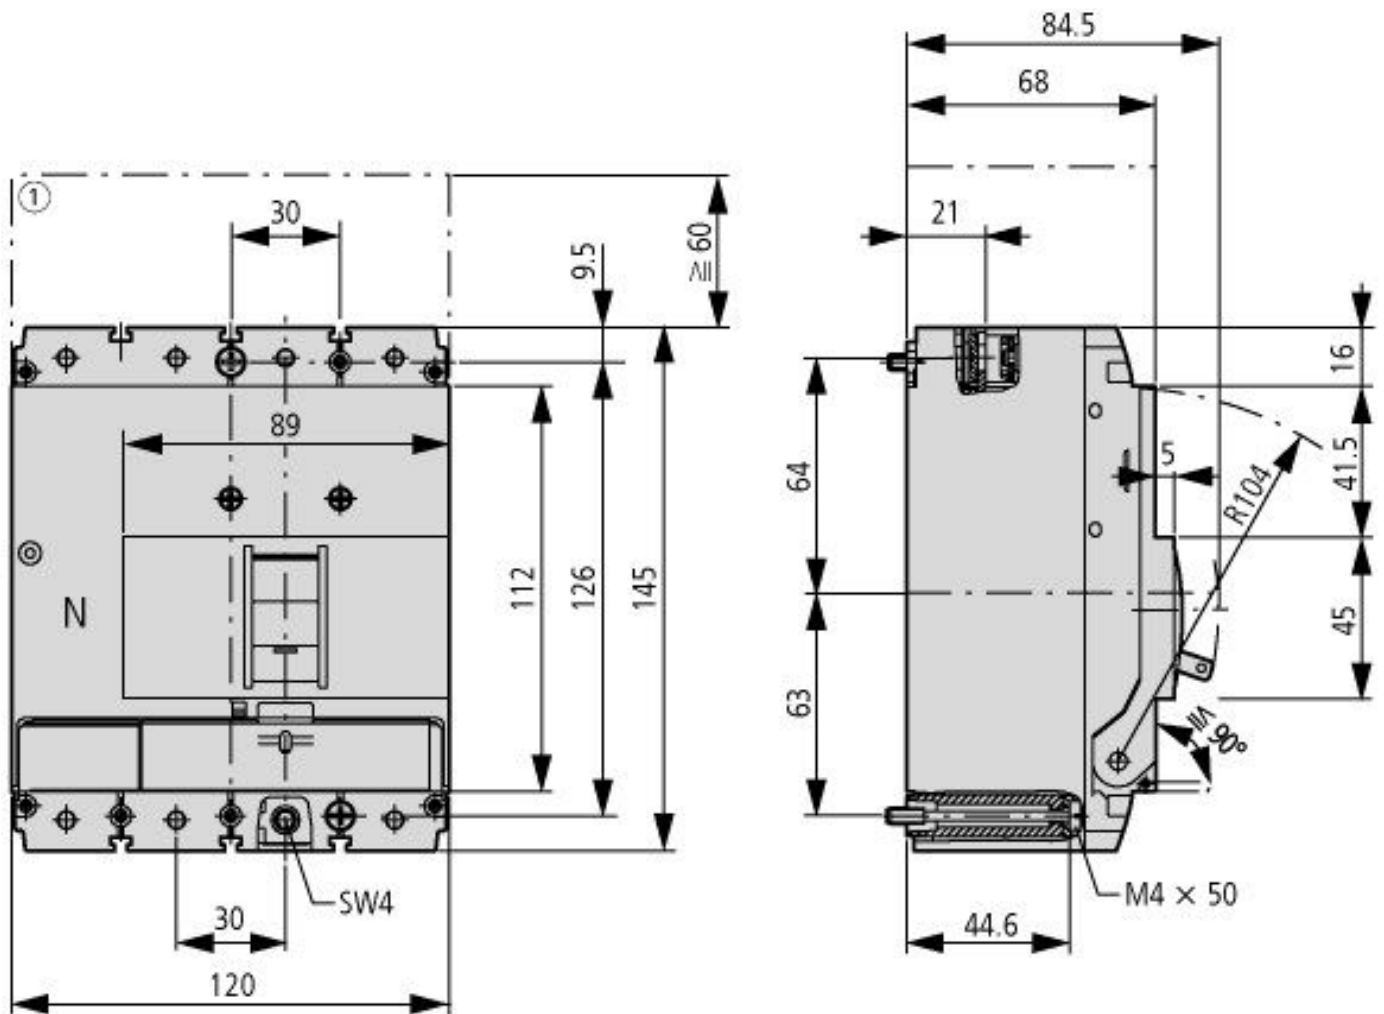

DESCRIPTION	Order No.
Switch Disconnecter, 4-pole, 63A - not remotely releasable	
Device category switch disconnecter, not remotely releaseable, Size type 1, Rated current 63A, Poles 4, IP Rating IP20, Tripping	MC163044
Unit without protection	